

GLORS Lighting is a reliable light manufacturer with design expertise. It boasts many private and even patent products, thanks to its creative designers, experienced engineers, and professional sales. Having been working in this field for over 17 years, they can turn your ideas into products, customize your products, and offer OEM and ODM service.

- **Business type:** lighting manufacturer and designer
- **Products:** outdoor architectural lights and indoor commercial lights
- **Advantage:** design expertise + quality products + reasonable price + 24/7 service
- **Certification:** ISO 9001:2005, CE, ROHS etc.
- **History:** Founded in 2016
- **Location:** Jiangmen City, Guangdong, China (about 2 hours away from Hong Kong International Airport)
- **Mission:** To light up your world together

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1001-1
E27 23W



W1001-2
E27 23W



W1001-3
LED 20W

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.





B2001-1
E27 23W



B2001-2
E27 23W




B2001-3
LED 20W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- Die Casting Aluminum Body - PC Diffuser



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- Die Casting Aluminum Body - PC Diffuser



Application Areas


Lawn, garden, park, pathway, driveway, square, campus etc.



B2002-1
E27 23W



B2002-2
E27 23W

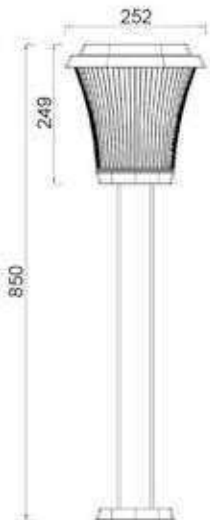

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI>80
CCT	
Description	- Die Casting Aluminum Body - PC Diffuser



B2002-3
LED 20W

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2002-4
Solar 3W




W1001-4
Solar 3W



W1001-4



B2001-4

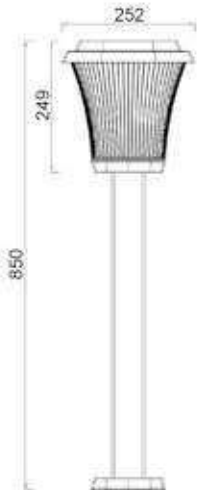

B2002-4



Solar brightness curve:
80% (first 3 hours)
50% (next 4 hours)
20% (till dawn)

6 color options with remote control:
Red / Green / Blue / White / Yellow / Purple

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.




S6001-1
E27 2*23W



S6001-2
E27 2*23W




S6001-3
LED 2*20W

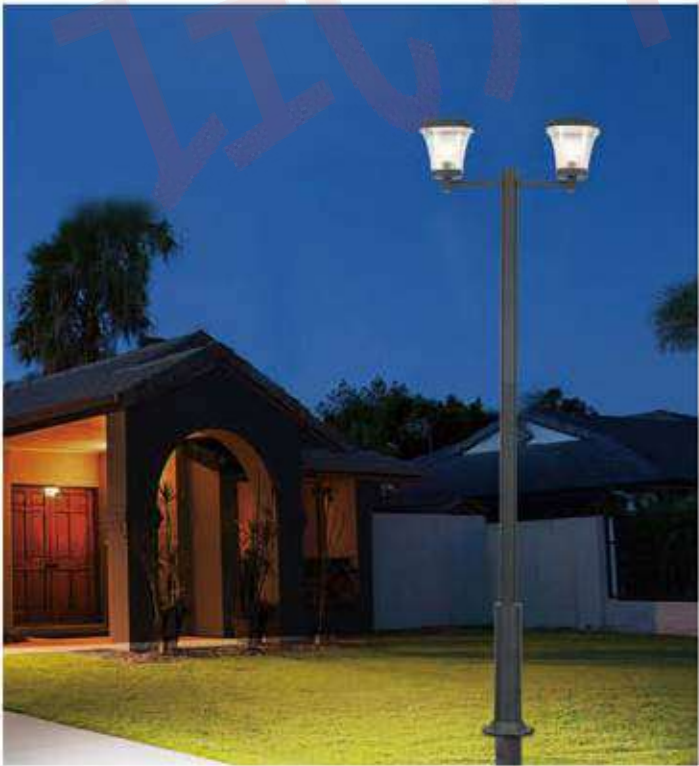

Application Areas



S6002-1
E27 3*23W



S6002-2
E27 3*23W



S6002-3
LED 3*20W

Product Specifications

140°

- Die Casting Aluminum Body
- PC Diffuser





Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1002
LED 4W
GX53




Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	Adjustable
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Tempered Glass Diffuser

Application Areas



Application Areas

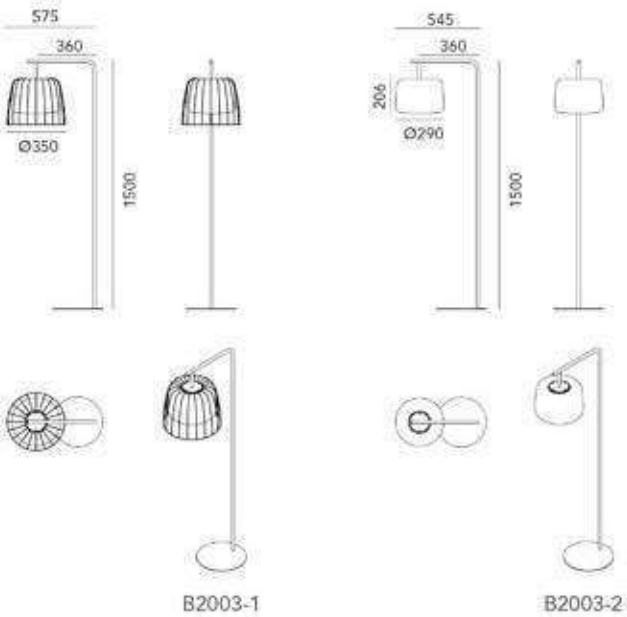

Product Specifications



140°

- Steel Body
- Opal PC Diffuser

Product Specifications

140°

- Steel Body
- Opal PC Diffuser


Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Body - Tempered Glass Diffuser

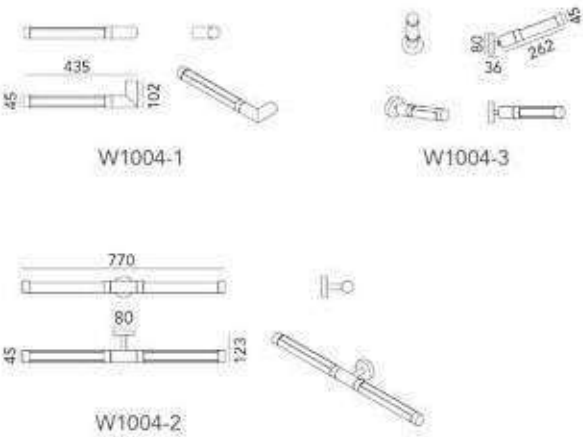

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

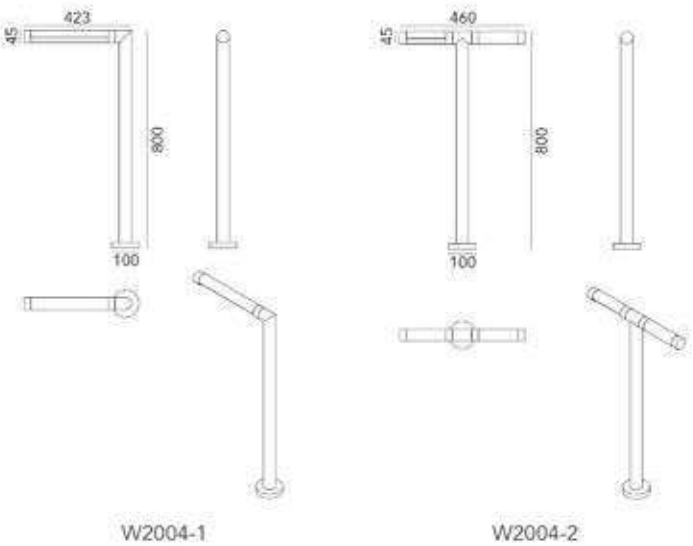

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Application Areas



Product Specifications



Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser



Application Areas




W1006R
E27 6W



W1006S
E27 6W

Product Specifications

140°
- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1007
LED 12W

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser



Application Areas




Application Areas

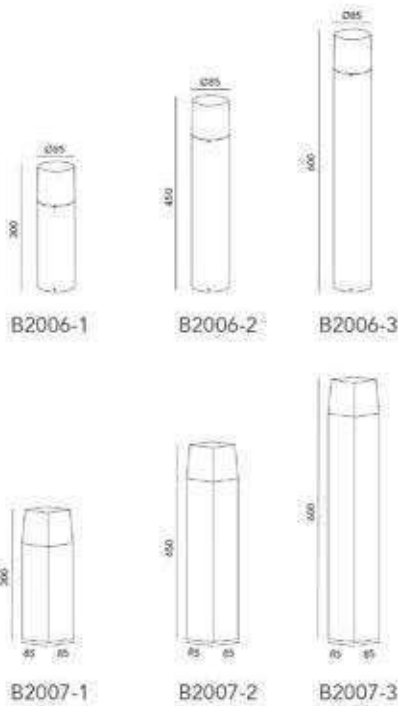

Product Specifications

140°
- Die Casting Aluminum Body
- Opal PC Diffuser

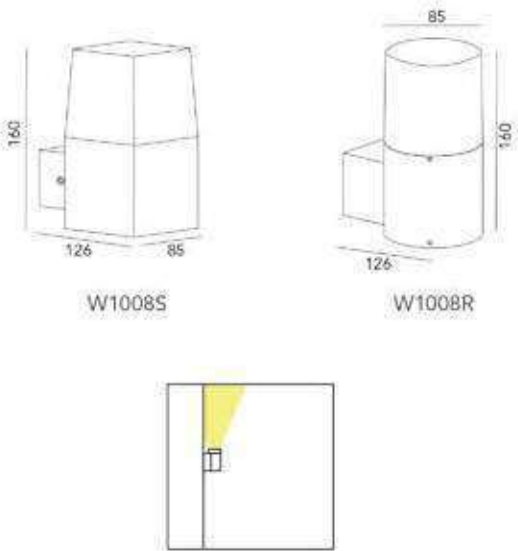

Application Areas




W1009
E27 15W


Application Areas



B2008-1 E27 15W
B2008-2 E27 15W
B2008-3 E27 15W

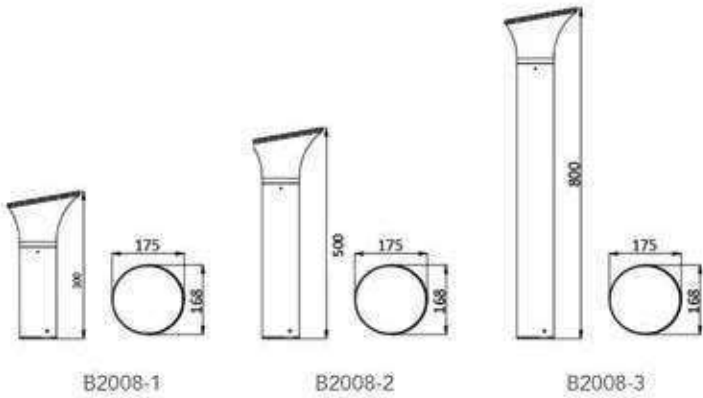

Product Specifications



140°

- Die Casting Aluminum Body
- Opal PC Diffuser

Product Specifications



140°

- Die Casting Aluminum Body
- Opal PC Diffuser



Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2009
LED 15W




W1010
LED 15W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



B2009



W1010

Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1011S
LED 14W



W1011R
LED 14W



W1011S



W1011R

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser


Application Areas




B2010S
LED 14W



B2010R
LED 14W



B2010S



B2010R



Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1012
LED 10W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser

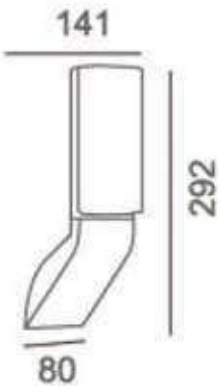

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1013
LED 12W




W1015
LED 9W




W1014
LED 18W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



W1013



W1015



W1014



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1016-1
LED 12W



W1016-2
LED 12W





W1016-3
LED 25W



W1016-4
LED 25W

Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Opal PC Diffuser




Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser




Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1020
LED 12W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

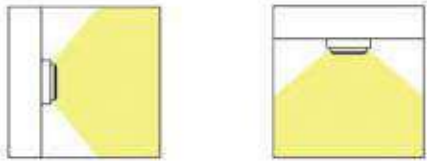

Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1021
LED 20W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser

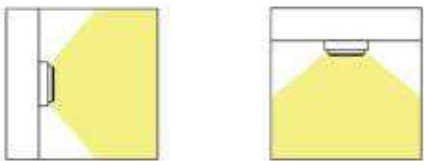



Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1022S
LED 15W



W1022L
LED 20W

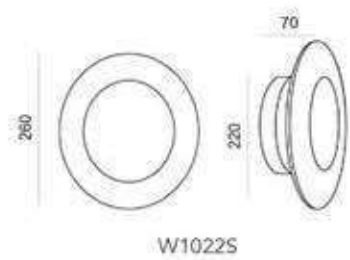

W1022S

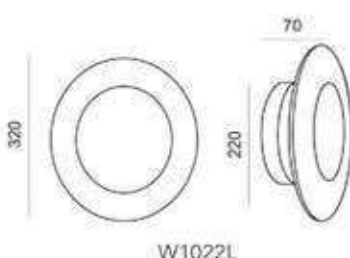


W1022L

Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Opal PC Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.

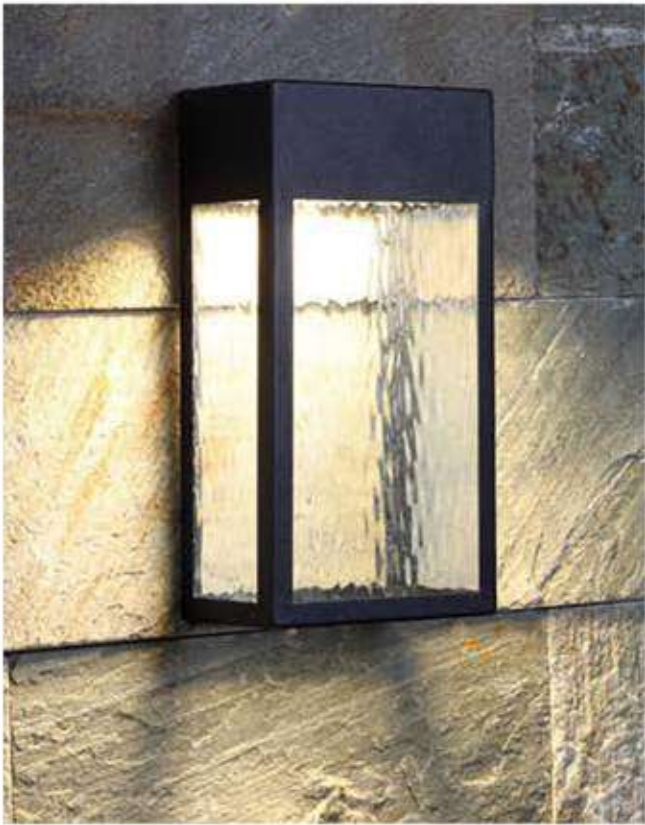

W1023
LED 8W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1025
LED 12W



W1024
LED 12W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1026R
LED 12W




W1026S
LED 9W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



W1026R



W1026S

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1027-2
LED 12W



W1027-3
LED 7W



W1027-5
LED 7W



W1027-1
LED 12W




W1027-4
LED 7W




W1027-6
LED 7W

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser




W1027-1



W1027-4/6



W1027-2/3



W1027-5

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser


Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser




Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

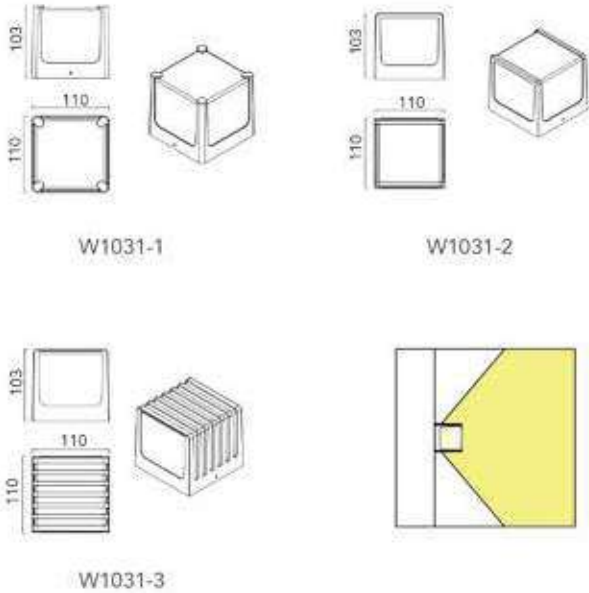


Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.

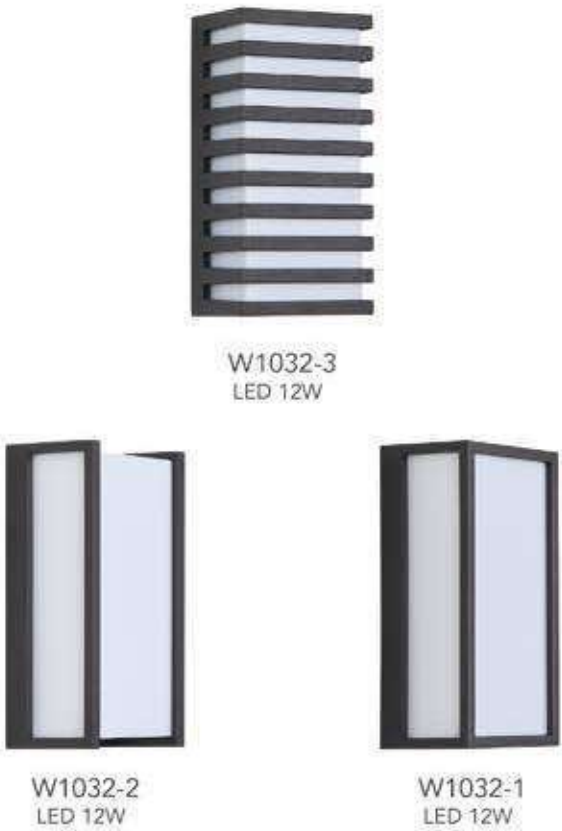

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1033
LED 20W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear PC Diffuser



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1034L
LED 40W




W1034M
LED 30W




W1034S
LED 20W

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser




W1034S



W1034M



W1034L



Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1035
LED 9W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1036
LED 12W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Acrylic Diffuser

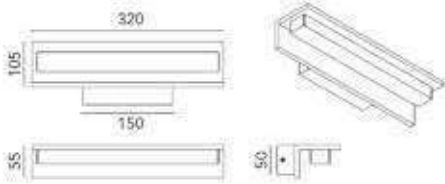

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1037
LED 8.5W

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1038L
LED 7.5W






W1038S
LED 7.5W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	6°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Acrylic Optical Lens

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

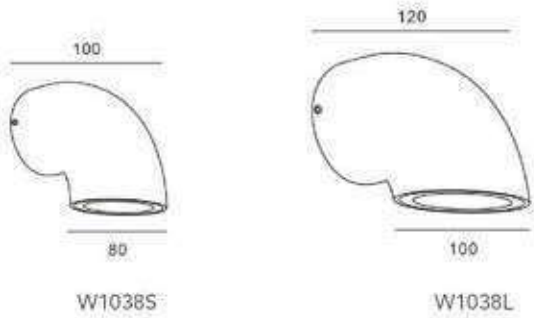

Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1039
LED 6W
GU10 9W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

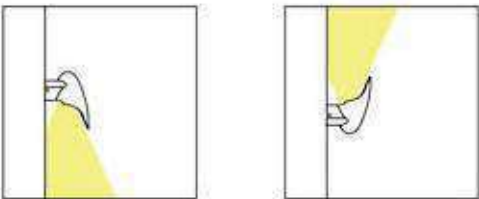

Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1040
LED 6W
GU10 9W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

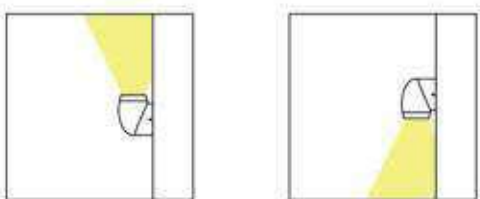

Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1041
LED 6W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	30 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1042
LED 12W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	30 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1043R
LED 7W




W1043S
LED 7W

Product Specifications



Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	180°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



W1043S



W1043R





Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1044S
LED 5W



W1045S
LED 5W



W1044L
LED 5W




W1045L
LED 5W

Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	107°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Opal PC Diffuser




W1044S



W1044L



W1045S



W1045L

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1046R
LED 9W



W1046S
LED 9W


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	107°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

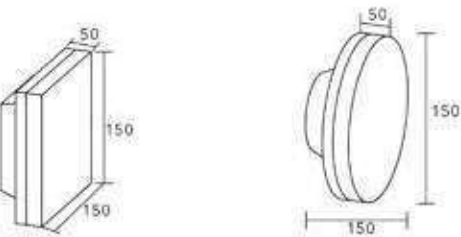

W1046S

W1046R



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1047
LED 6W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Lens




Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Size	W50*H44mm
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Acrylic Diffuser

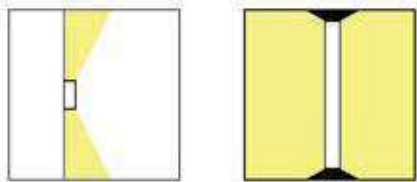



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1049-1
LED 4W




W1050-1
LED 4W




W1049-2
LED 2*4W





W1050-2
LED 2*4W




W1049-1



W1050-1



W1049-2



W1050-2




Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.

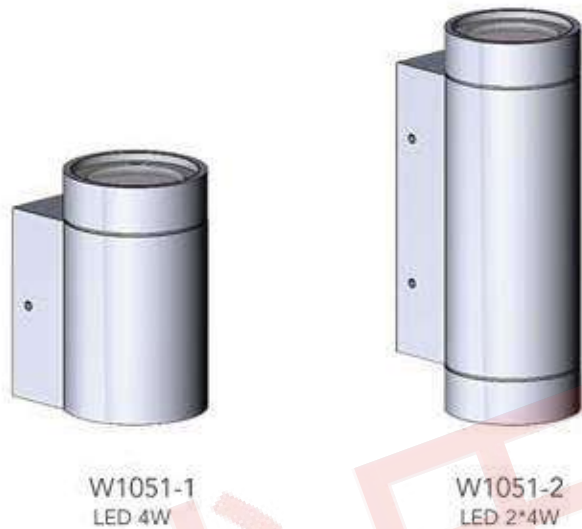


Product Specifications

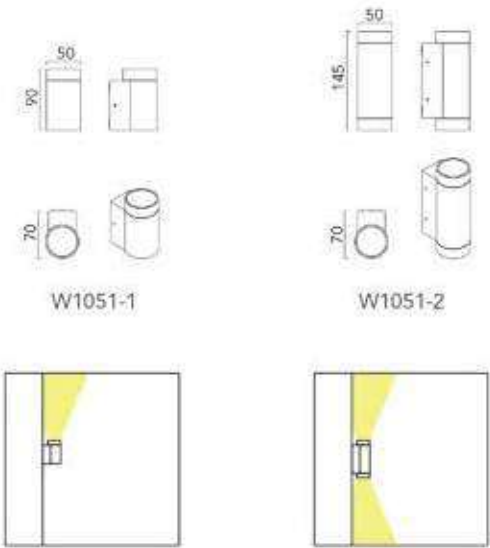


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.

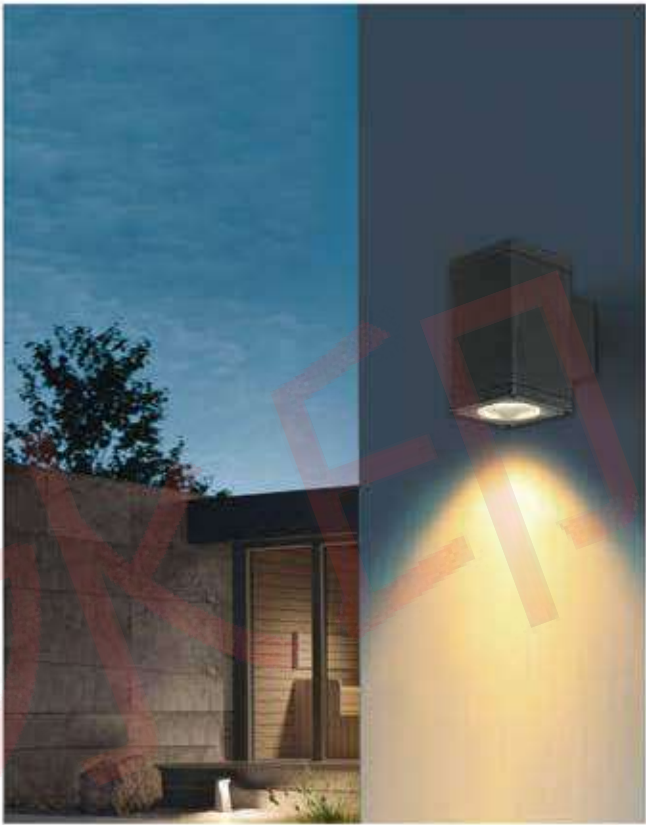

Product Specifications

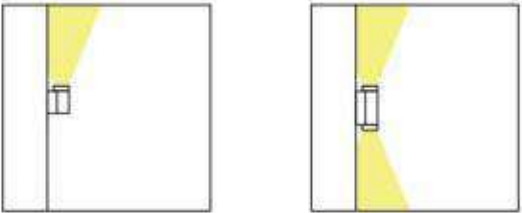

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas


Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1053-1
LED 5W





W1053-2
LED 2*5W



W1053-1



W1053-2



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Tempered Glass Diffuser



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1054-1
LED 2*3W



W1054-2
LED 4*3W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	4°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

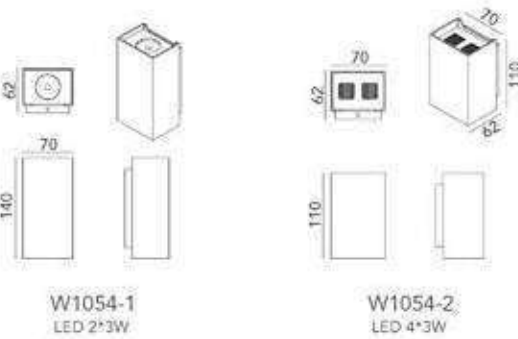

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1055-1
LED 10W



W1055-2
LED 12W




W1055-3
LED 20W



W1055-4
LED 30W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

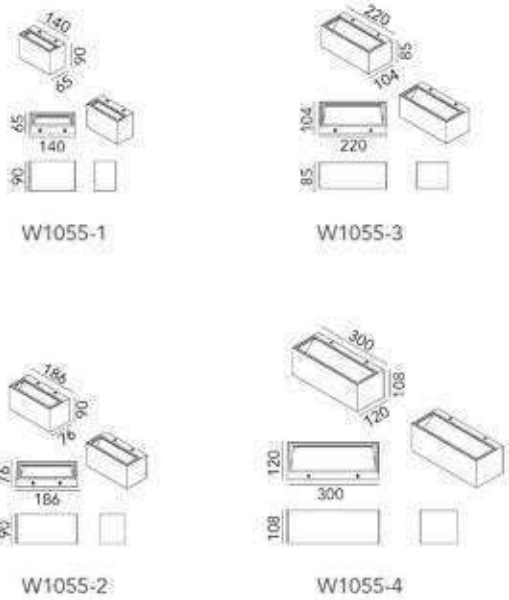

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1056-1
LED 8W/12W



W1056-2
LED 2*10W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

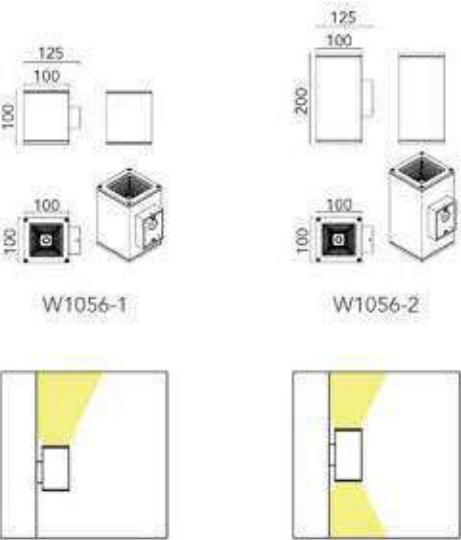

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1057-1
LED 12W



W1057-2
LED 12W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

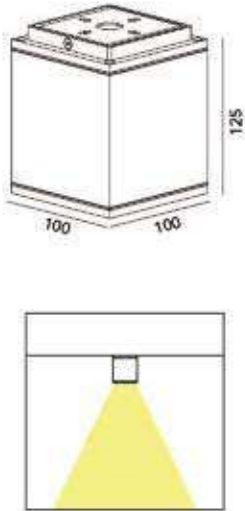

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser





Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1060
LED 2*3W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	Adjustable
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1061S
LED 3W



W1061R
LED 3W





W1062S
LED 2*3W



W1062R
LED 2*3W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.





W1063
LED 6W



W1064
LED 2*6W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser





Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1065-1
LED 3W



W1065-2
LED 3W



W1065-5
LED 3W



W1065-1



W1065-2



W1065-3




W1065-4




W1065-5




W1065-6




W1065-1




W1065-2




W1065-3




W1065-4



W1065-5



W1065-6



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1066-1
LED 3W



W1066-2
LED 3W

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.




W1067
LED 12W



W1068
LED 8W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser (W1067) - Tempered Glass Diffuser (W1068)

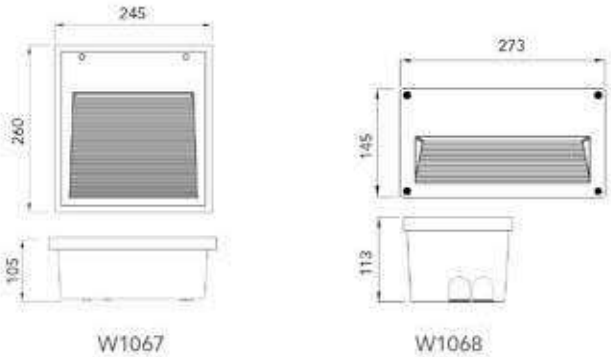

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1069-1
LED 6W




W1069-3
LED 6W





W1069-4
LED 6W

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



W1069-1



W1069-3



W1069-4

Application Areas




Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1070
LED 3W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	5°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

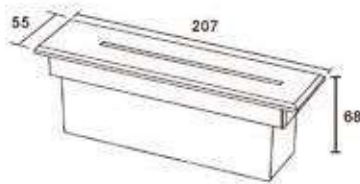

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1071L
LED 10W




W1071M
LED 6W



W1071S
LED 3W

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser




W1071M



W1071L



W1071S



Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1072-1
LED 7W




W1072-2
LED 7W




W1072-3
LED 7W

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser




W1072-2



W1072-3



W1072-1




Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Glass Diffuser

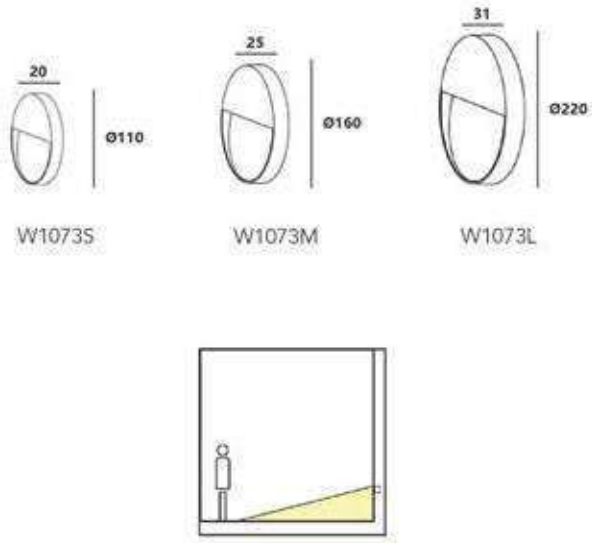


Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Glass Diffuser

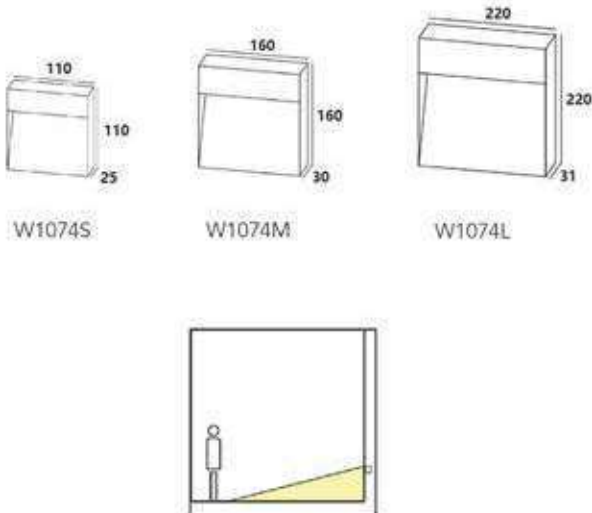



Application Areas



Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



W1075
LED 3W

Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	110°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Lamp Body
	- Clear Glass Diffuser





Application Areas



B2011 Solar
Solar-3W



B2011S
E27 15W




B2011M
E27 25W




B2011L
E27 45W





B2011S



B2011M



B2011 Solar



B2011L

Product Specifications

140°

- Die Casting Aluminum Body
- Opal PC Diffuser

Application Areas


Lawn, garden, park, pathway, driveway, square, campus etc.




B2012S
E27 15W



B2012L
E27 25W



B2012S



B2012L



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- Die Casting Aluminum Body - Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.




B2013 Sand
Solar 3W



B2013 Solar
Solar 3W




B2013 E27
E27 15W



B2013 Sand



B2013 Solar



B2013 E27




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- Die Casting Aluminum Body - Clear / Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

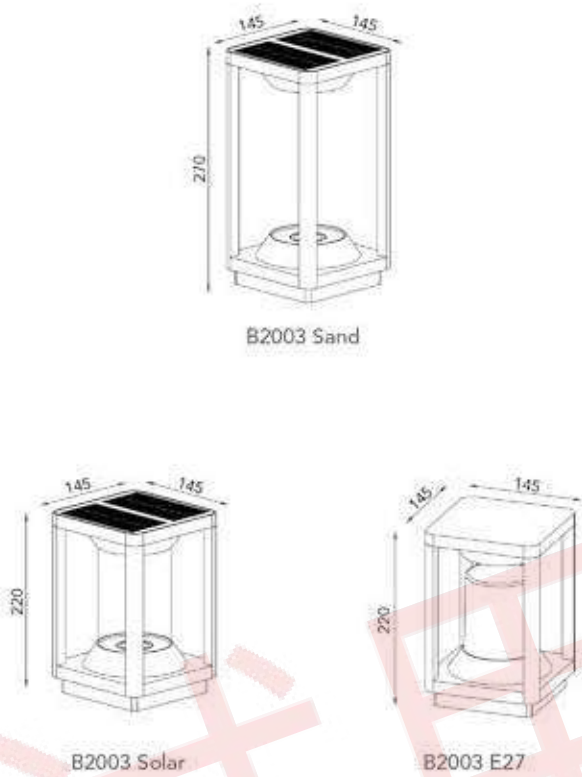

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- Die Casting Aluminum Body - Clear / Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- Die Casting Aluminum Body - Clear / Opal PC Diffuser

Application Areas



B2016-1
E27 15W



B2016-2
E27 15W

Application Areas




B2017S
E27 15W




B2017M
E27 15W




B2017L
E27 15W



B2017L




B2017M



B2017S

Product Specifications

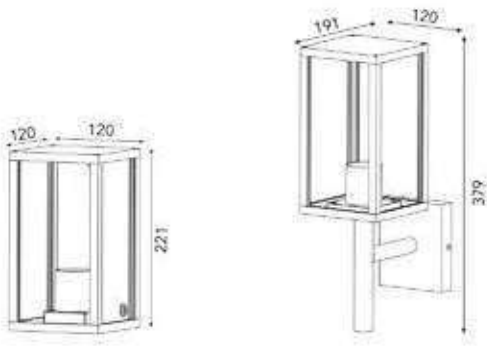

B2016-1

B2016-2

140°

- Die Casting Aluminum Body
- Glass Diffuser



Product Specifications

140°

- Die Casting Aluminum Body
- Glass Diffuser



Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2018S
Solar 3W




B2018L
Solar 3W

Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Opal PC Diffuser


Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

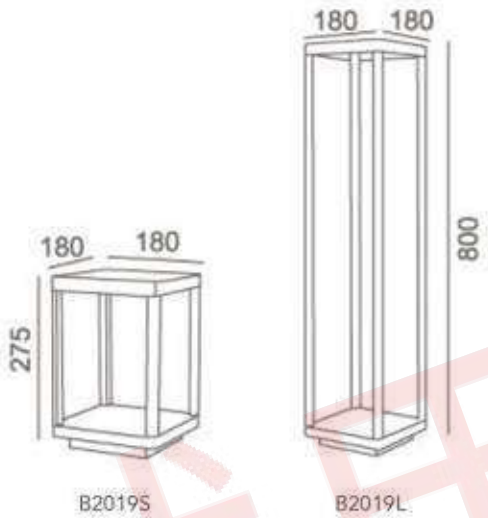

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

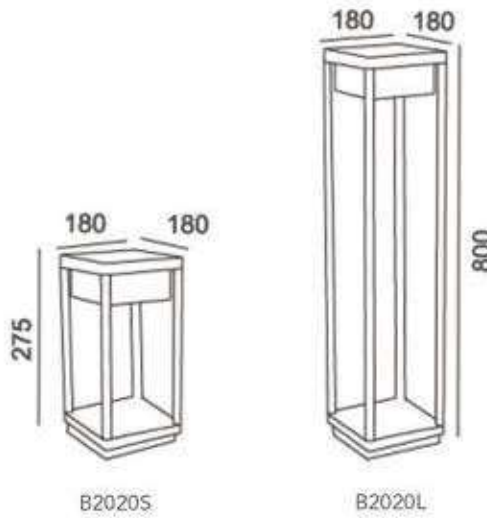

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	120°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear Tempered Glass Diffuser



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2021
Solar 3W



Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2022
Solar 3W

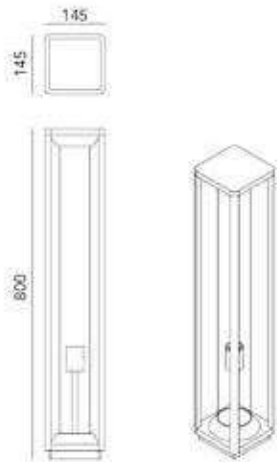

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear PC Diffuser



Application Areas


Lawn, garden, park, pathway, driveway, square, campus etc.



B2023
LED 8W

Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White / Wood
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	114°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Opal PC Diffuser

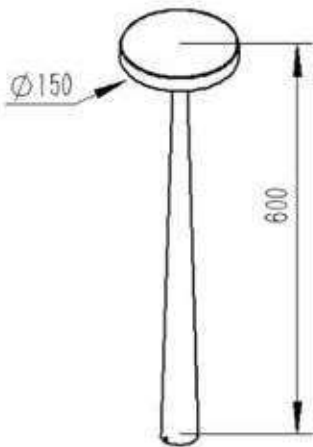


Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2024
LED 8W

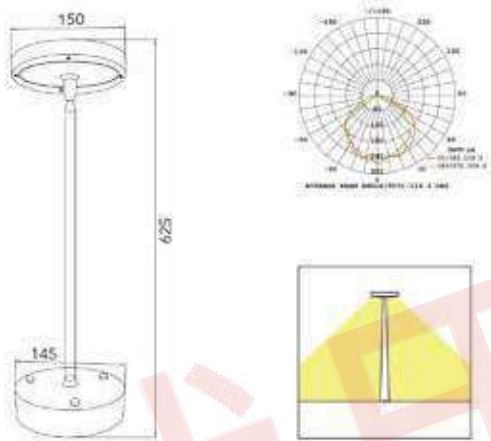

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	Adjustable
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2025
LED 12W




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

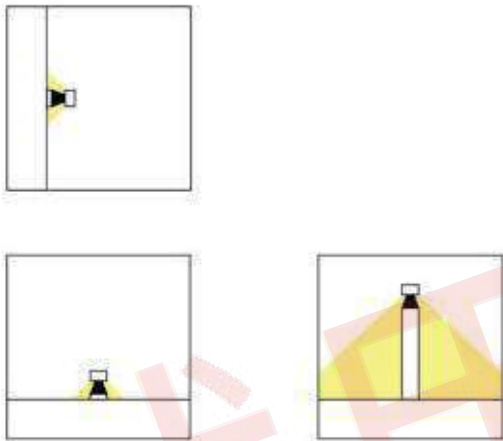


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

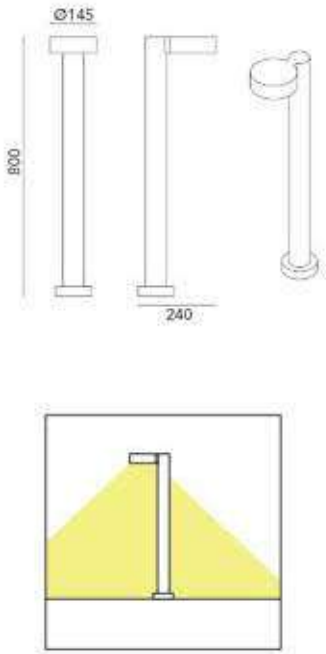

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

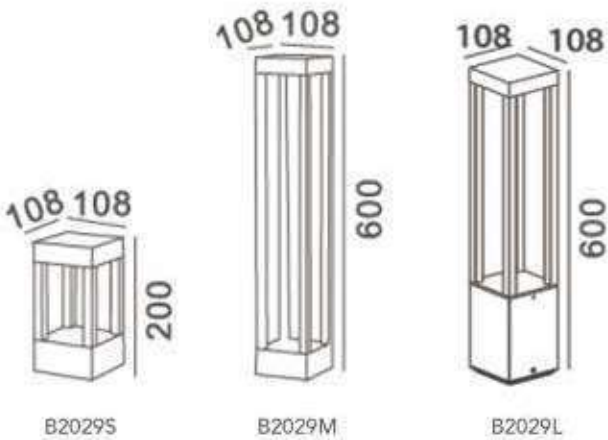

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas



Lawn, garden, park, pathway, driveway, square, campus etc.



B2030
LED 12W


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	110°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

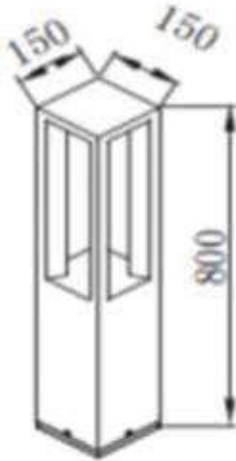


Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

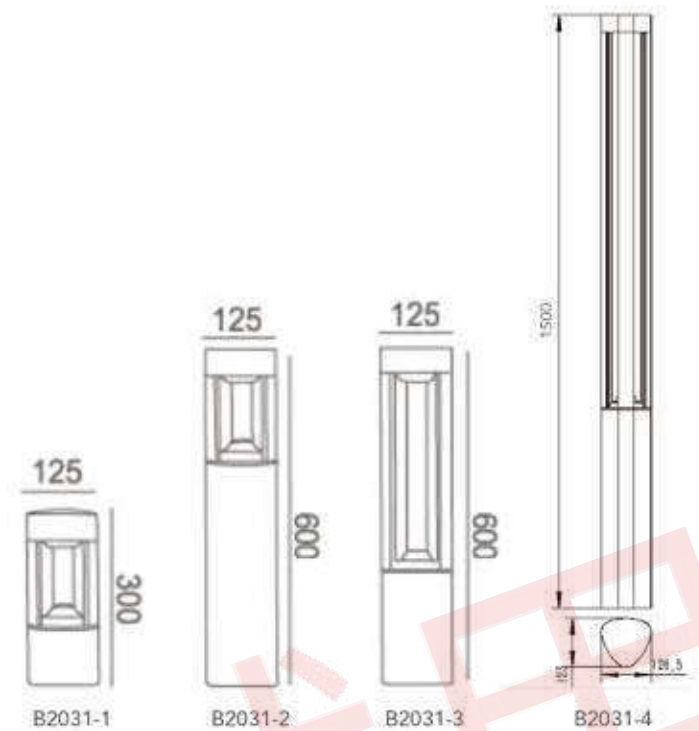

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

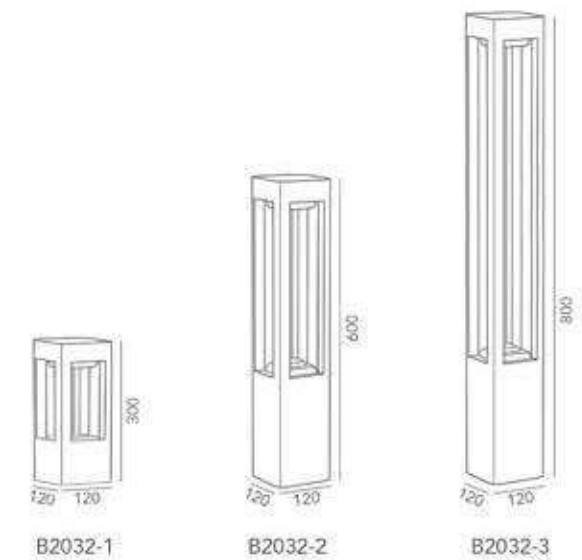

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser

Application Areas


Lawn, garden, park, pathway, driveway, square, campus etc.



B2033L
LED 7W



B2033S
LED 7W

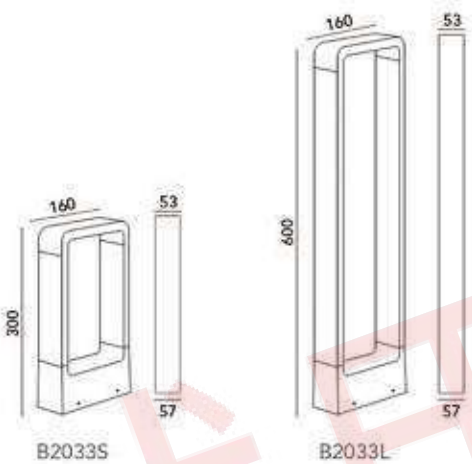

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas


Lawn, garden, park, pathway, driveway, square, campus etc.



B2034S
LED 8W



B2034L
LED 15W

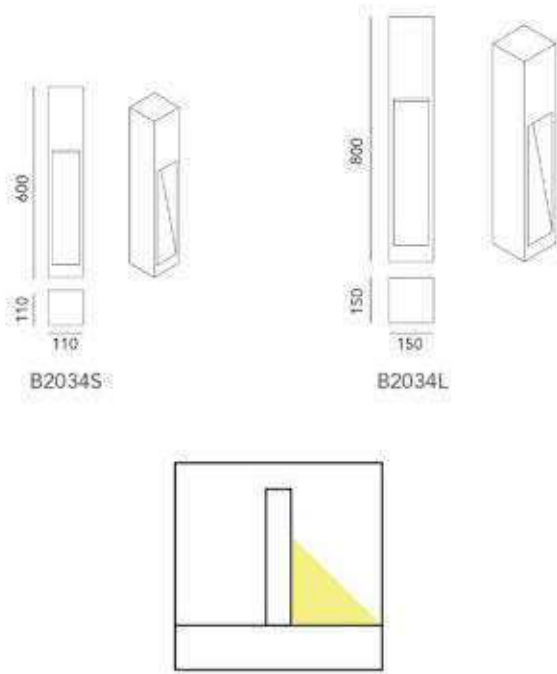

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2035-1
LED 8W



B2035-2
LED 2*8W



Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2036
LED 10W

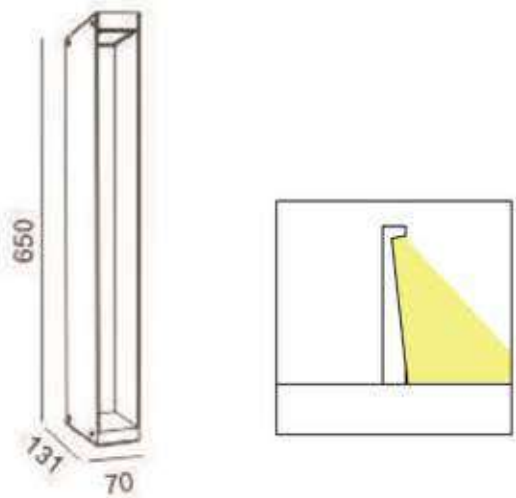

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Robust Aluminum Alloy Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2037
LED 8W/12W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2038
LED 14W



B2039
LED 8W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser (B2038) - Tempered Glass Diffuser (B2039)



Application Areas



Lawn, garden, park, pathway, driveway, square, campus etc.



B2040L
LED 15W/18W



B2040S
LED 10W

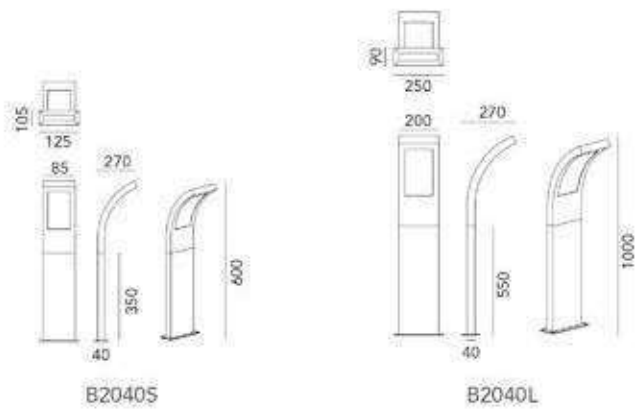

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2041-1
LED 8W



B2041-2
LED 2*8W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas


Lawn, garden, park, pathway, driveway, square, campus etc.



B2042-1
LED 10W

B2042-2
LED 10W

B2042-3
LED 10W

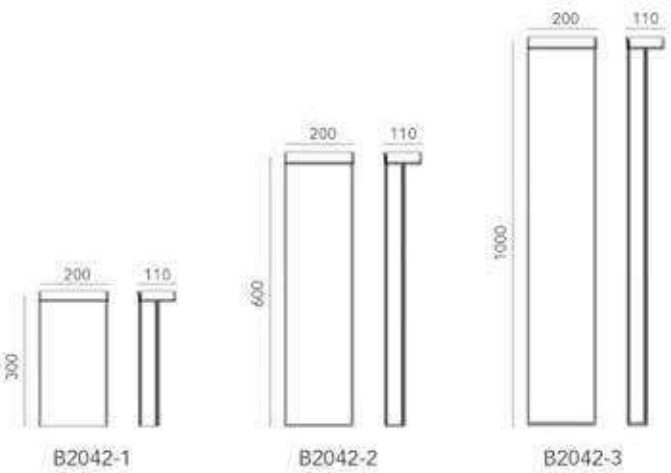

Product Specifications



Body Color	Shiny Black / Dark Grey / Matt Black / Matt White / Wood
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



B2043
LED 12W

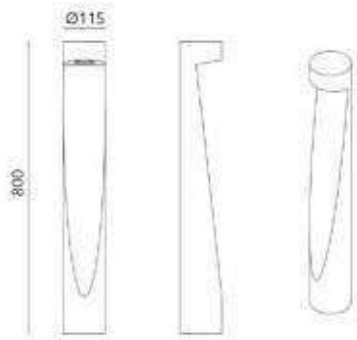

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	100°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Facade, boundary wall, entry, balcony, hallway, stairway, living room etc of the hotel, resort, shop, home, office, hospital, church etc.



B2044
LED 12W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.




B2045-1
LED 10W




B2045-2
LED 10W

Product Specifications


Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- PC Diffuser



B2045-1




B2045-2





Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

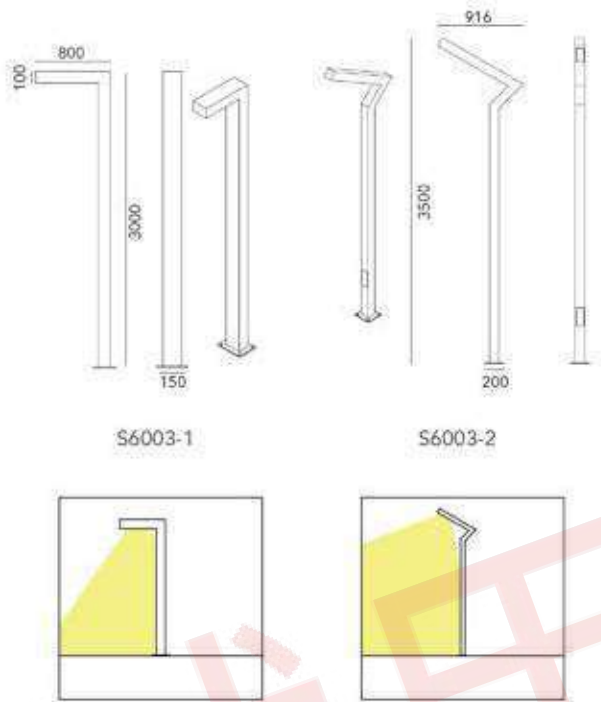

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

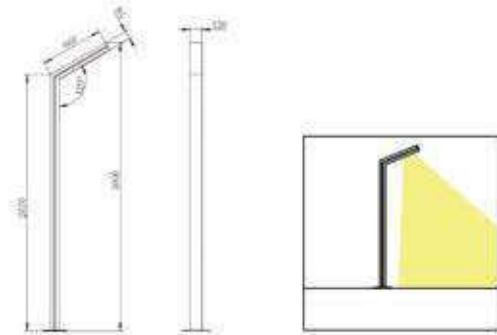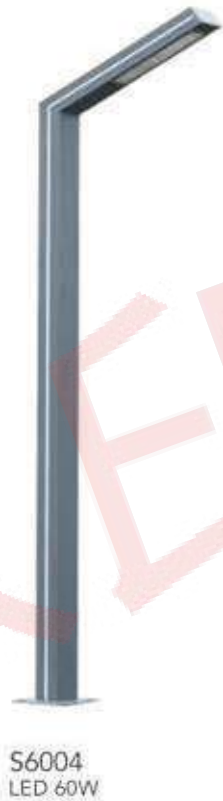

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser



Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2046

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body / Aluminum - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2047
LED 12W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2048
LED 3W




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.

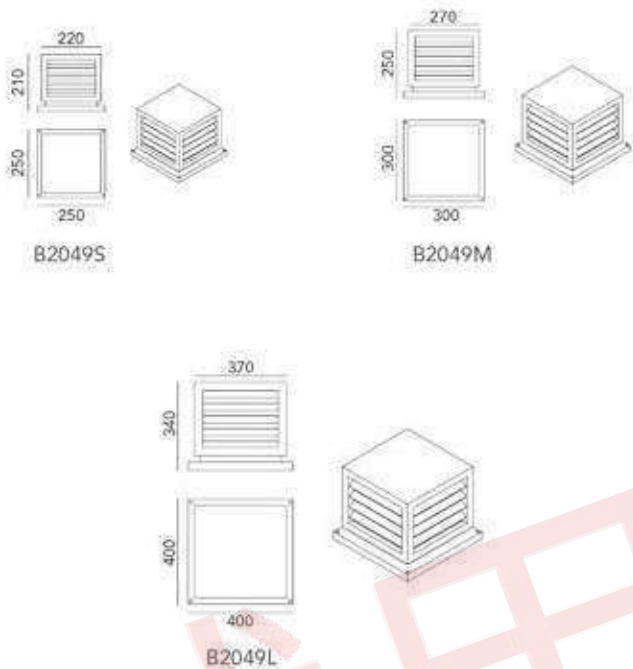

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	120°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.



B2051
E27 15W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	140°
Beam Angle	
Color Rendering Index	CRI≥80
CCT	
Description	- Robust Aluminum Alloy Body - Tempered Glass Diffuser

Application Areas

Lawn, garden, park, pathway, driveway, square, campus etc.




B2052
E27 15W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	
Description	- PP Lampbdoy - PC Difusser

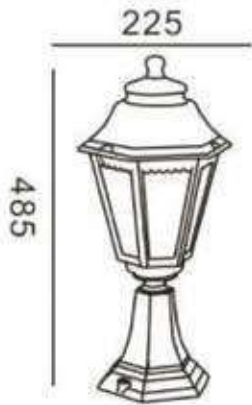



Application Areas



Trees, bushes, columns, billboards, facade, monuments etc.



P3001S
LED 10W



P3001L
LED 20W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.

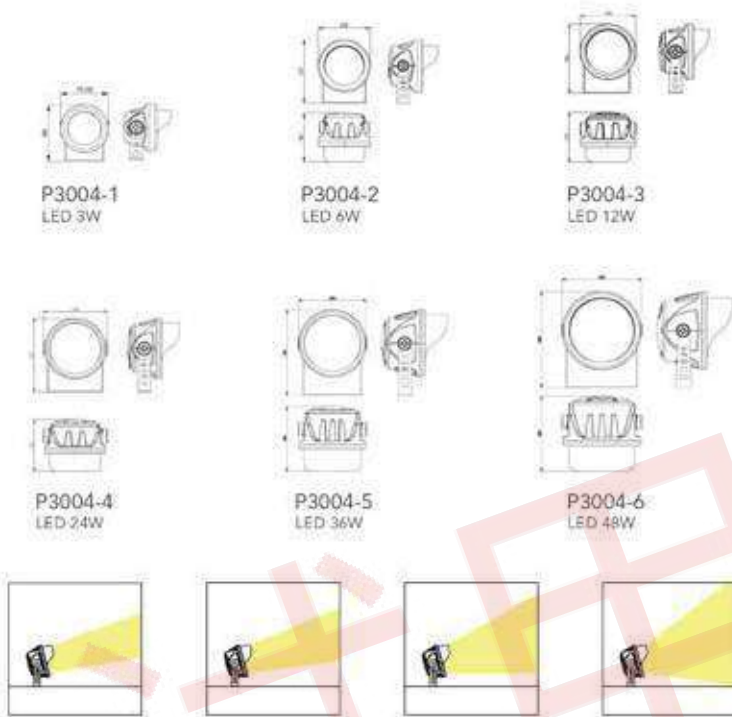


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.

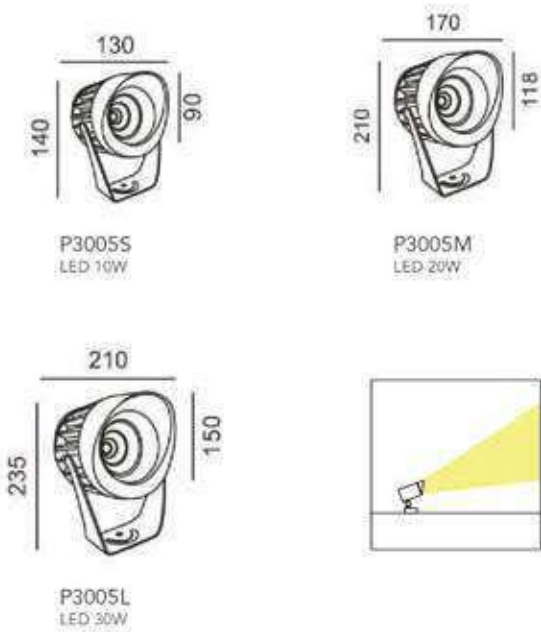

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



P3006-2
LED 7W




P3006-1
LED 7W



P3006-3
LED 7W




P3006-2



P3006-1



P3006-3



Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Trees, bushes, columns, billboards, facade, monuments etc.



P3011
LED 3W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	8 / 15 / 30°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Alloy Body - Tempered Glass Diffuser

Application Areas


Trees, bushes, columns, billboards, facade, monuments etc.



P3012-1
LED 3W




P3012-2
LED 3W



P3012-1



P3012-2



Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	8 / 15 / 30°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminium Body - Tempered Glass Diffuser



IP65 RoHS CE F L ALU

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

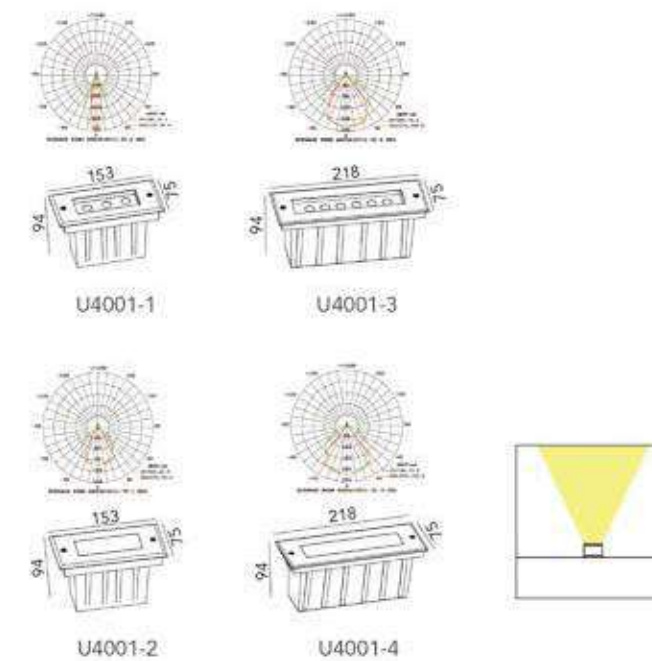


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	33 / 76 / 90 / 91°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - SS304 Cover - Clear Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

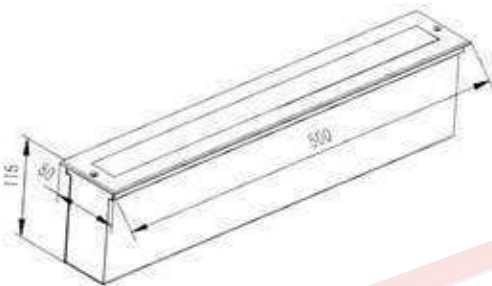


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	7*25 / 15°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel 304 Cover - Die Casting Aluminum Body - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

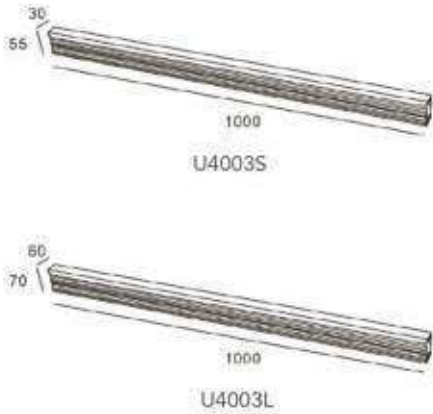


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Body - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

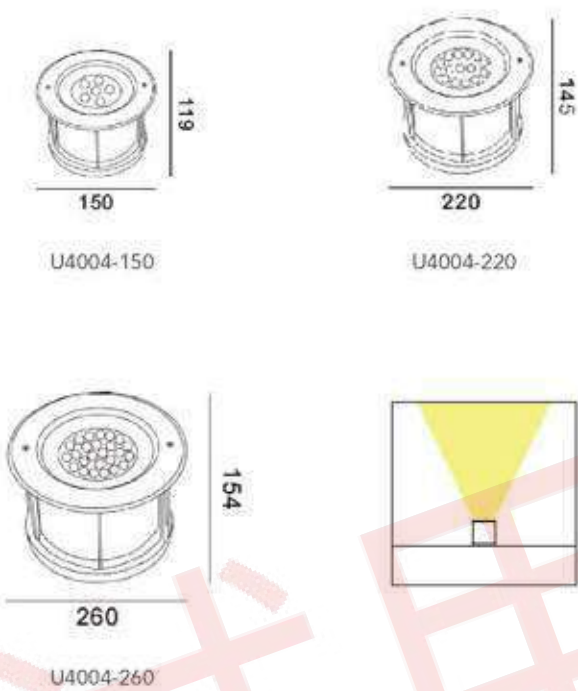


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum - Stainless Steel 304 Cover - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

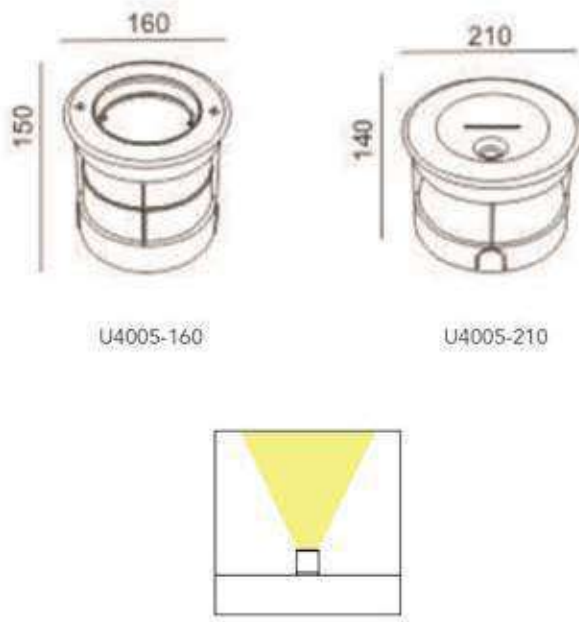

Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum - Stainless Steel 304 Cover - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.



U4006
LED 6W



Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum - Stainless Steel 304 Cover - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.



U4008
LED 6W




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum - Stainless Steel 304 Cover - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

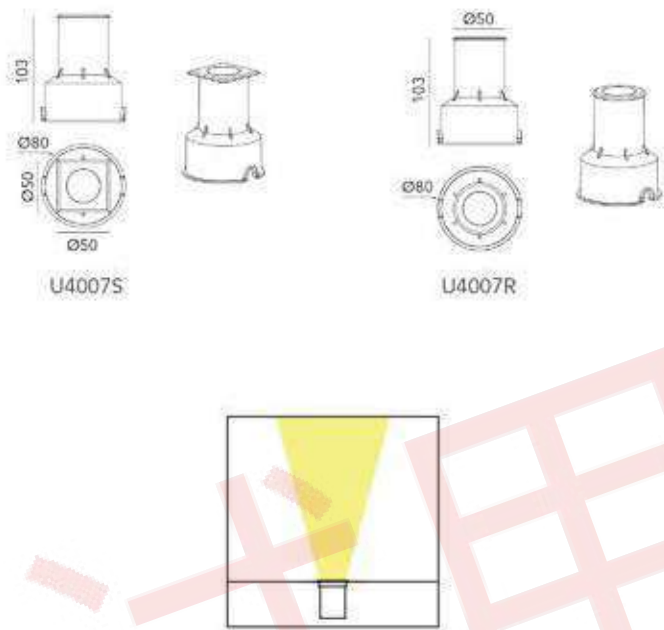


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum - Stainless Steel 304 Cover - Tempered Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

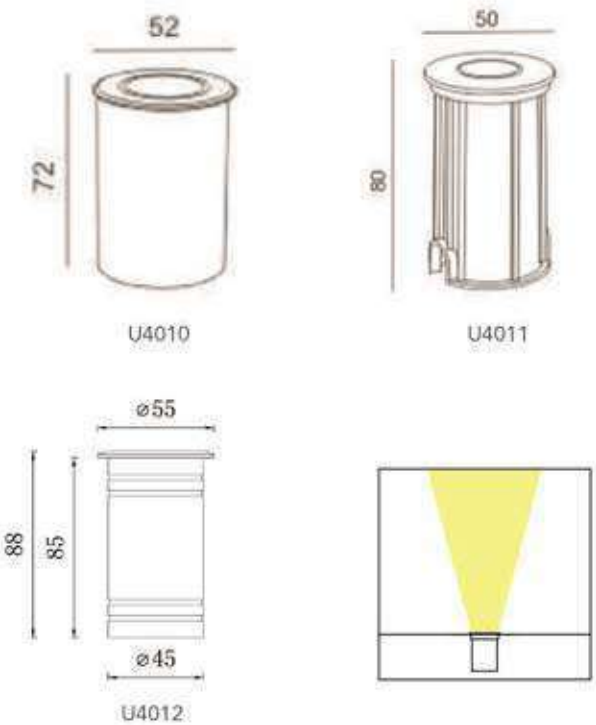


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	8 / 15 / 30°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Clear PC Diffuser (U4010) - SS304 Cover (U4011) - Tempered Clear Glass Diffuser (U4012)

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

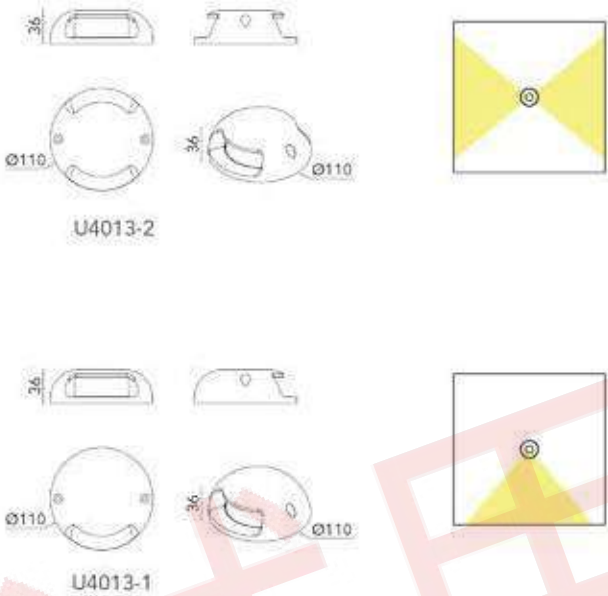


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Lampbody - Transparent PC Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

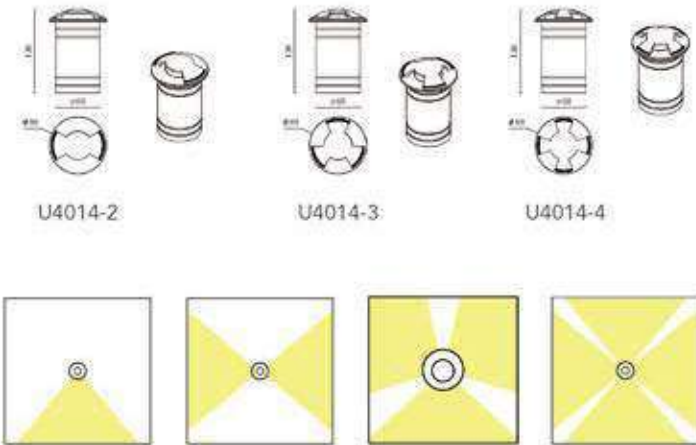


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - SS304 Cover - Tempered Clear Glass Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

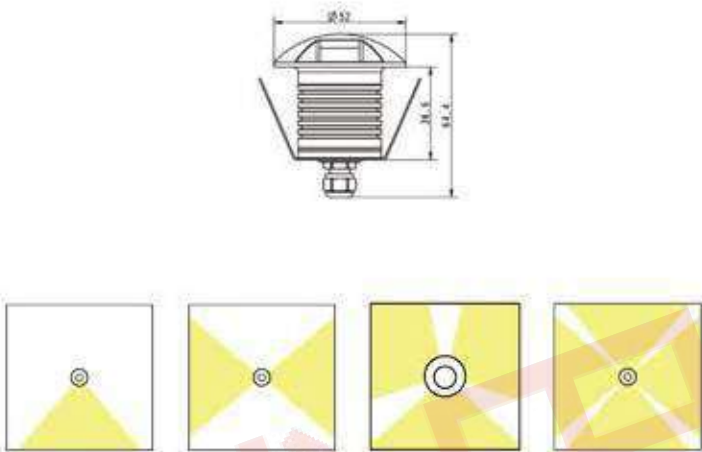


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Body - Clear PC Diffuser

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.

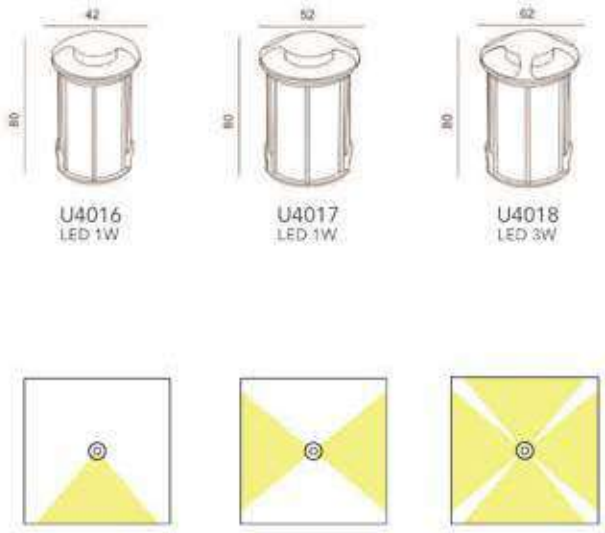




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - SS304 Cover - Tempered Clear Glass Diffuser



Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	DC 24V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 30°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel 304 Cover - Die Casting Aluminum Body - Tempered Glass Diffuser



Underwater Light

IP68 RoHS CE V F L ALU

Application Areas

Pathway, driveway, stairway, terrace, deck, square, pool, fountain, etc.




U4020-100




U4020-150



U4020-210



U4020-100
LED 3W



U4020-150
LED 6W




U4020-210
LED 15W



U4020-240
LED 18W



U4020-300
LED 25W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Stainless Steel 304 Body - Tempered Glass Diffuser




Application Areas

Facade, boundary wall, bridge etc.




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V / DC 24V
Output Life Span	30,000h / 50,000h
Beam Angle	10°/60 / 15°
Color Rendering Index	CRI>80
CCT	3000K / 4000K / 5700K / RGB
Description	- Aluminum Lamp Body - Tempered Glass Diffuser

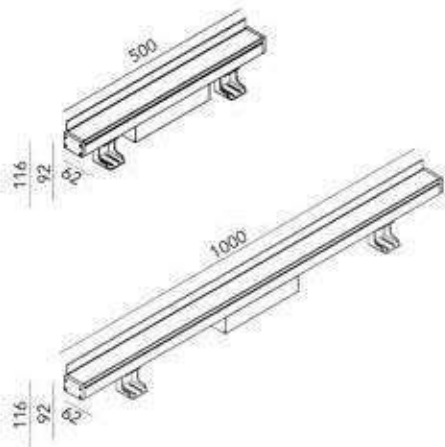


Application Areas

Facade, boundary wall, bridge etc.

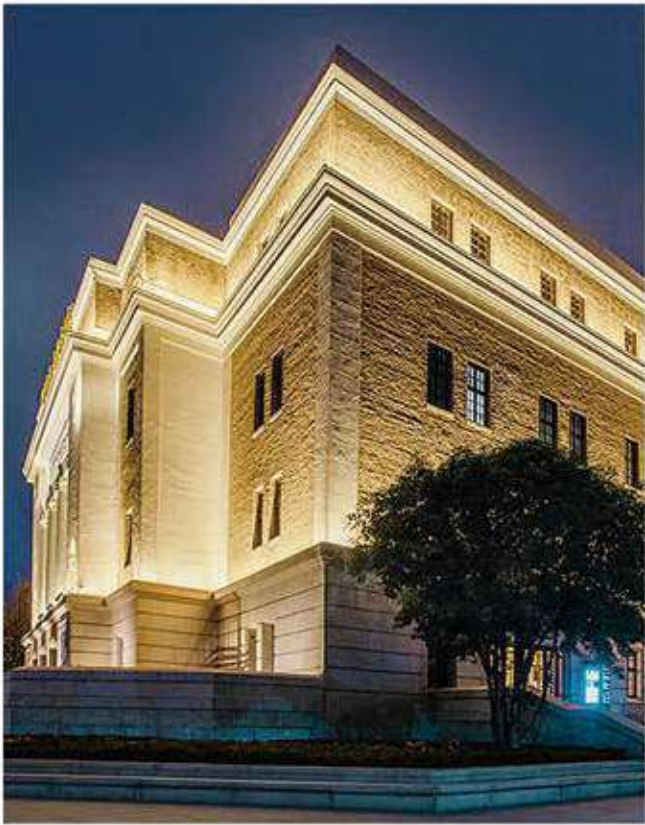

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15*35° / 25*55°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 5700K / RGB
Description	- Aluminum Profile Body - Tempered Glass Diffuser

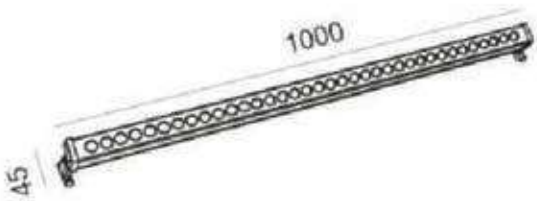


Application Areas

Facade, boundary wall, bridge etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Body - Opal PC Diffuser





Application Areas


Office, gallery, museum, hotel, shop, home etc.



L7001
LED 20W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	160°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Lamp Body - Opal PC Diffuser



Application Areas

Office, gallery, museum, hotel, shop, home etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	160°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Body - Opal PC Diffuser





Application Areas

Office, gallery, museum, hotel, shop, home etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	160°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Lamp Body - Opal PC Diffuser



Application Areas

Office, gallery, museum, hotel, shop, home etc.



L7004
LED 40W

Application Areas


Office, gallery, museum, hotel, shop, home etc.



L7005
LED 40W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 38 / 50°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Lamp Body - Opal PC Diffuser

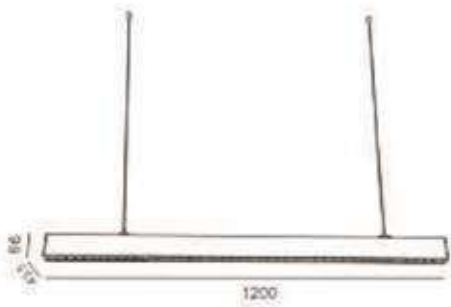

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	160°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Lamp Body - Opal PC Diffuser

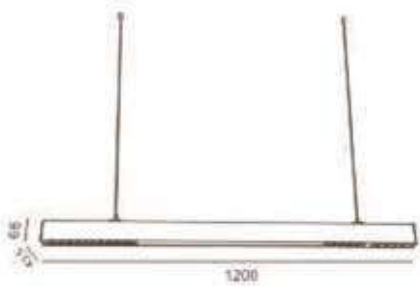

Application Areas

Office, gallery, museum, hotel, shop, home etc.




L7006-5M
LED 10W/M



L7006-10M
LED 10W/M

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Stainless Steel Belt

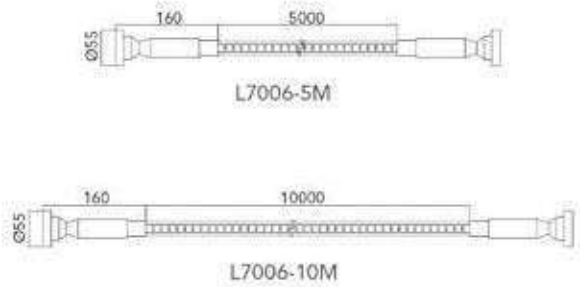

Application Areas

Office, gallery, museum, hotel, shop, home etc.



L7007-20W
LED 20W



L7007-40W
LED 40W



L7007-60W
LED 60W

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Profile Lamp Body - Opal PC Diffuser





IP54 RoHS CE F L ALU

Application Areas

Hotel, shop, home, office, gallery, museum etc.



D8001-1
LED 6W



D8001-2
LED 12W



D8001-3/4
LED 20W



D8001-1




D8001-2



D8001-3



D8001-4





Product Specifications

Body Color	Shiny Black / Dark Grey /
	Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body
	- Tempered Glass Diffuser

Application Areas

Hotel, shop, home, office, gallery, museum etc.

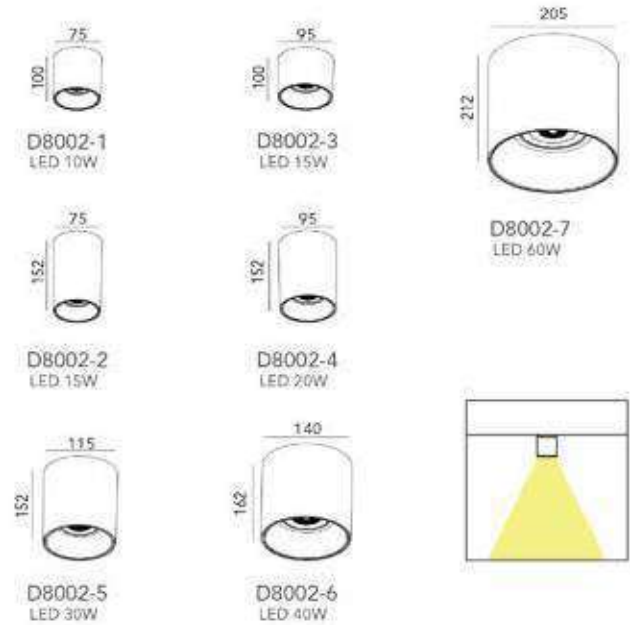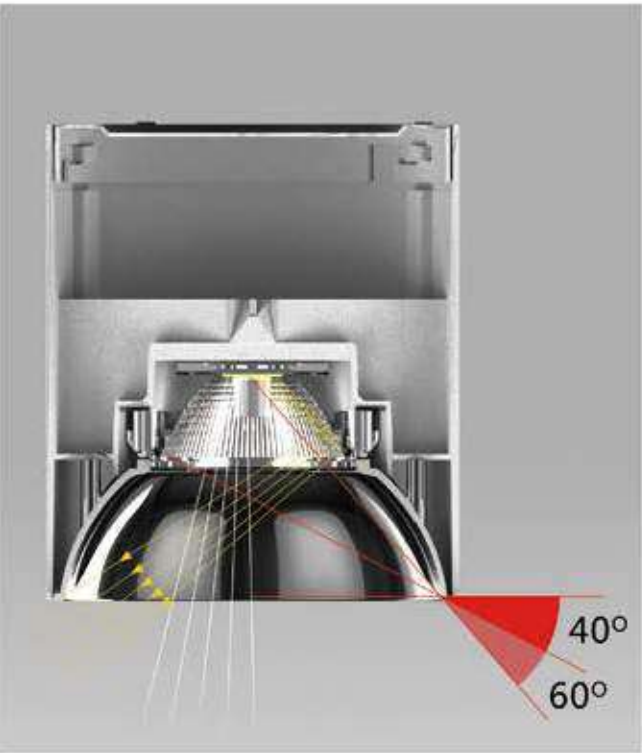

IP65 RoHS CE F L ALU



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI>80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Waterproof Lens






Application Areas

Hotel, shop, home, office, gallery, museum etc.



D8003

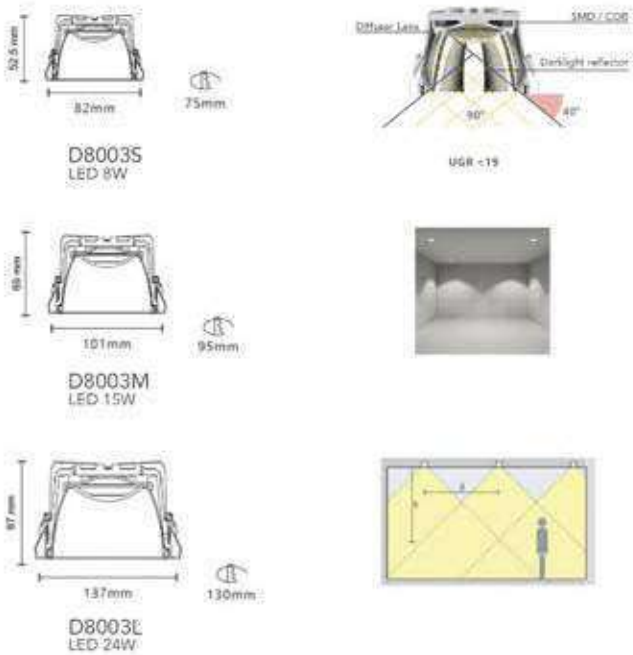

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	90°
Color Rendering Index	CRI>80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector

Application Areas

Hotel, shop, home, office, gallery, museum etc.




D8004




Product Specifications


Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector



D8004S
LED 8W



D8004M
LED 15W



D8004L
LED 24W




Application Areas

Hotel, shop, home, office, gallery, museum etc.




D8005

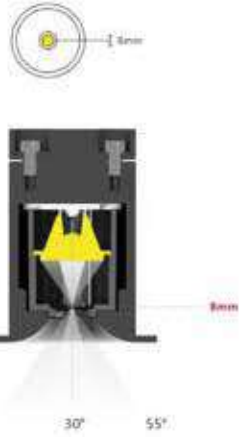


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	30 / 55°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector

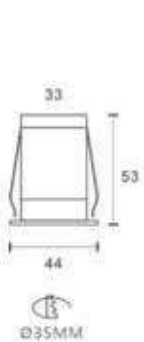


D8005S
LED 3W

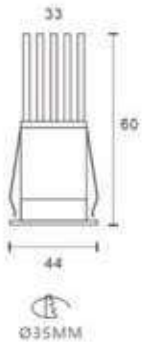

D8005L
LED 8W

Application Areas

Hotel, shop, home, office, gallery, museum etc.

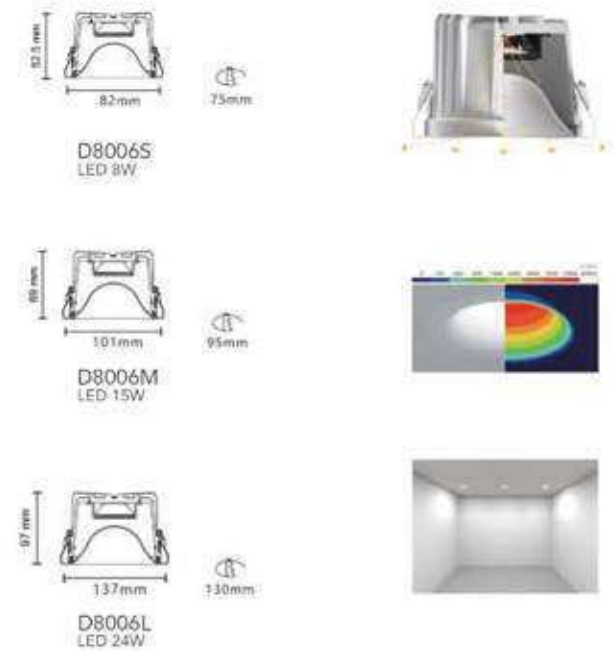

D8006




Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	110°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector

Application Areas

Hotel, shop, home, office, gallery, museum etc.

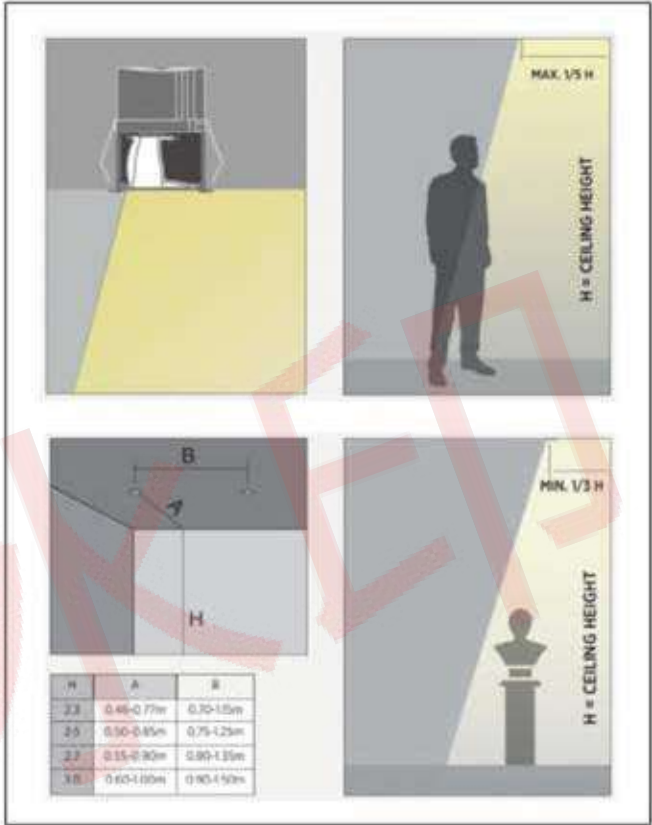

D8007
LED 10W



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	48°x35°x13°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector



Application Areas


Hotel, shop, home, office, gallery, museum etc.



D8008


Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector



Application Areas

Hotel, shop, home, office, gallery, museum etc.

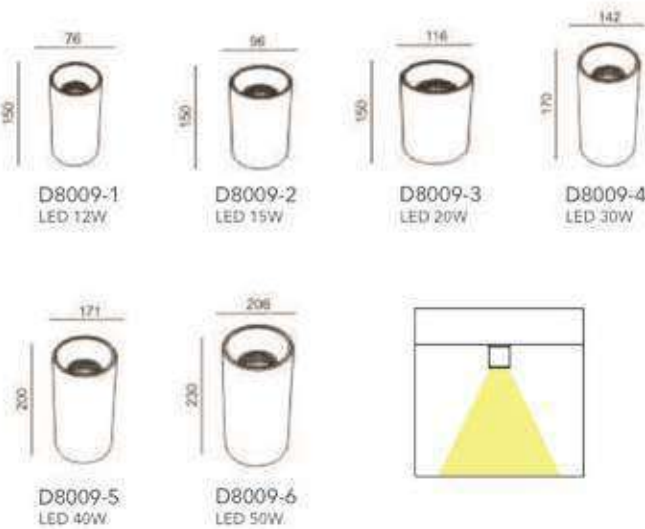

Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Anti Glare Optic Reflector



Application Areas

Hotel, shop, home, office, gallery, museum etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Opal PC Diffuser



Application Areas

Hotel, shop, home, office, gallery, museum etc.




D8011R
LED 12W




D8011S
LED 12W




D8012
LED 2*12W




D8011R



D8011S



D8012



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - With Anti Glare Optic Reflector

Application Areas

Hotel, shop, home, office, gallery, museum etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	15 / 24 / 36 / 45 / 60°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - Tempered Glass Diffuser



Application Areas

Office, gallery, museum, hotel, shop, home etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Aluminum Lamp Body - Opal PC Diffuser



Application Areas

Office, gallery, museum, hotel, shop, home etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser




Application Areas

Office, gallery, museum, hotel, shop, home etc.



Product Specifications

Body Color	Shiny Black / Dark Grey / Matt Black / Matt White
Voltage	200-240V / 90-260V
Output Life Span	30,000h / 50,000h
Beam Angle	140°
Color Rendering Index	CRI≥80
CCT	3000K / 4000K / 6500K
Description	- Die Casting Aluminum Body - PC Diffuser






MASK

Hight transmittance PMMA light guide plate Soft and comfortable light


Multi section ring

There are 3 kinds of face rings for later debugging and application. If you want to change the lighting effect, you just need to change the face loops.



G-3045

Power	功率 : 6W
LED	光源品牌 : CREE XPG3
CRL	显 指 : Ra90
CCT	色 温 : 3000K/4000K/6000K
Luminous Flux	光 通 量 : 101.5lm/3000K/108.5lm4000K/115.5lm6000K
Beam Angle	光 束 角 : 24° (10° 36° 48° 10×35°)
Material	主要材质 : Casting

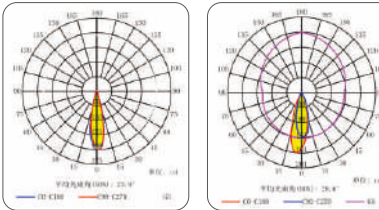

Optional color :




Sand White Sand Black






试用



G-3046

Power	功率: 12W
LED	光源品牌: CREE XPG3
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 101.5lm 3000K/108.5lm 4000K/115.5lm 6000K
Beam Angle	光束角: 24° (10° 36° 48° 10° 35°)
Material	主要材质: Casting

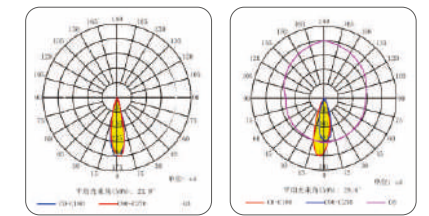




Straight type according to
Beam accurate projection




MASK
High transmittance PMMA light guide plate Soft
and comfortable light

Multi section ring
There are 3 kinds of face rings for later debugging
and application. If you want to change the lighting
effect, you just need to change the face loops.



MZ-156/MZ-157/MZ-143/MZ-155
Power 功 率 : 6W/12W
LED 光源品牌 : CREE XPG3
CRL 显 指 : Ra90
CCT 色 温 : 3000K/4000K/6000K
Luminous Flux 光 通 量 : 101.5lm 3000K/108.5lm 4000K/115.5lm 6000K
Beam Angle 光 束 角 : 24° (10° 36° 48° 10×35°)
Material 主要材质 : Casting

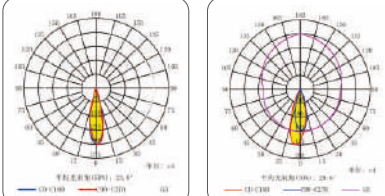

Optional color :
 Sand White
 Sand Black









Straight type according to
Beam accurate projection

Intelligent Light Control
智能控光



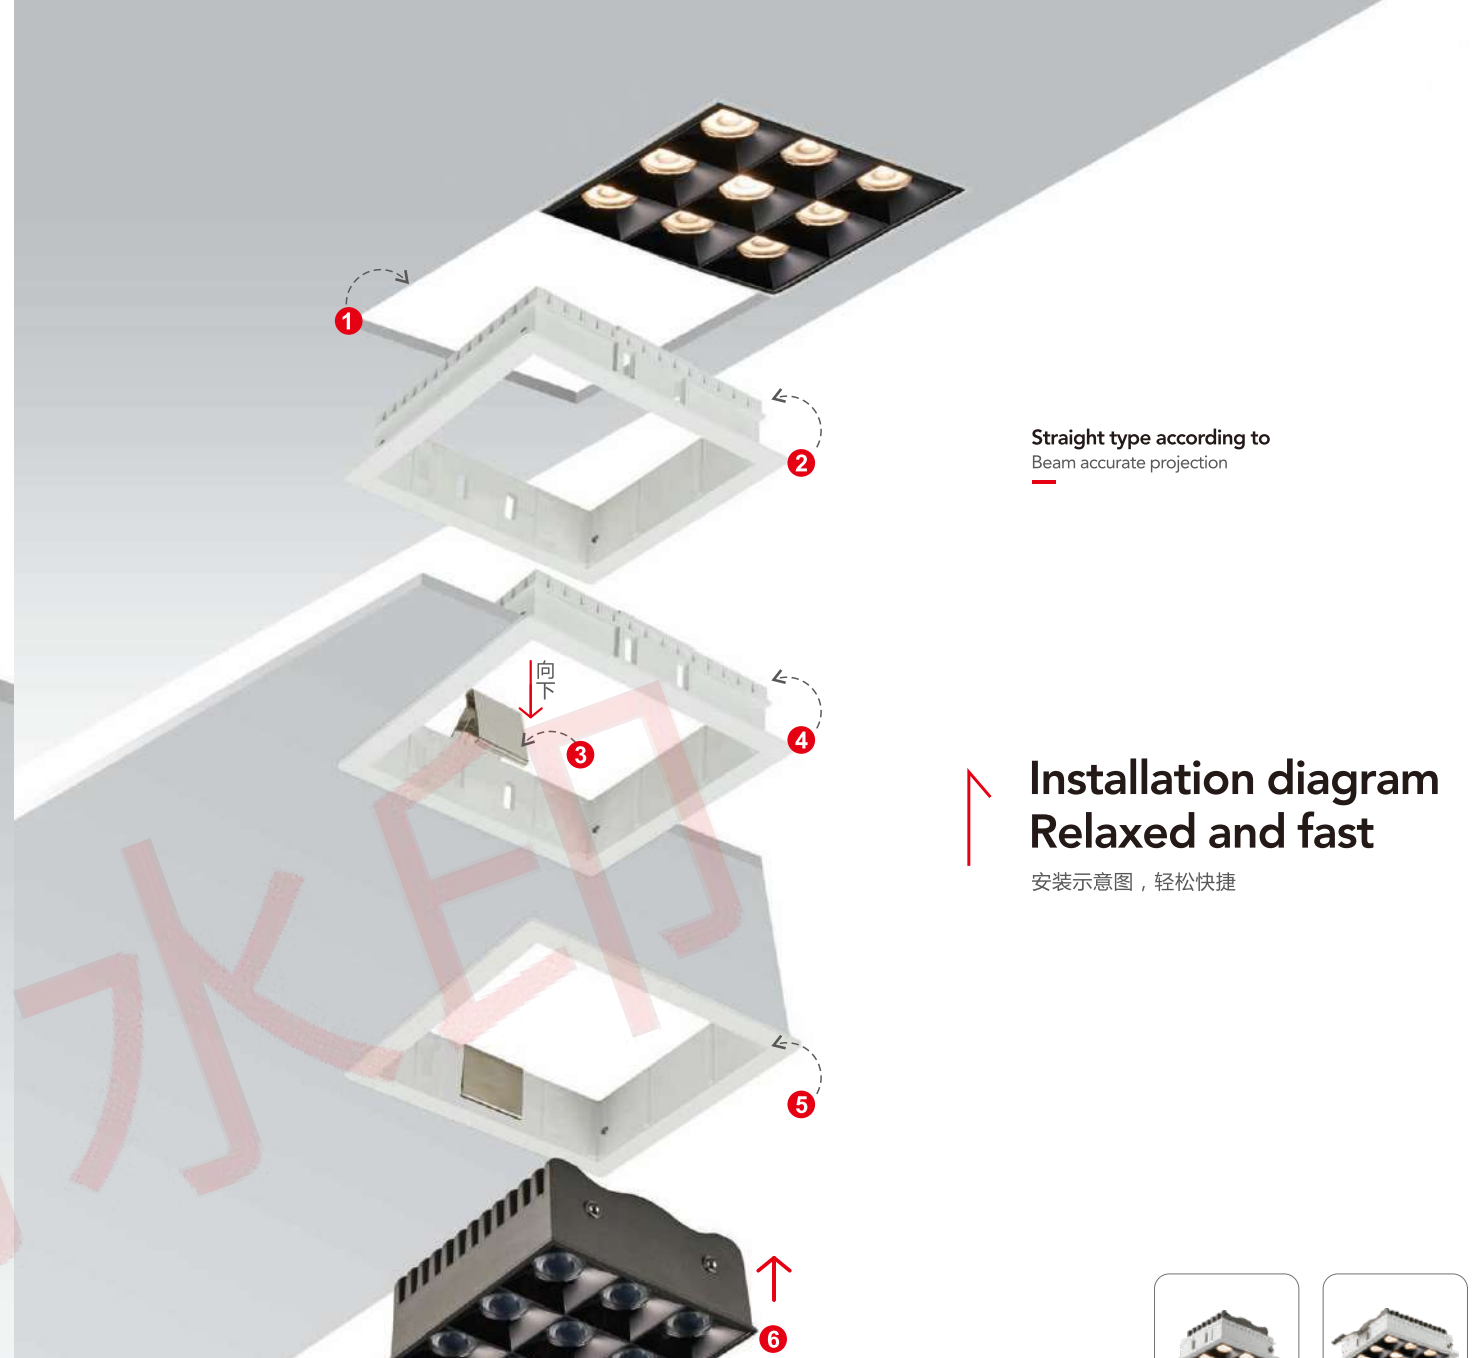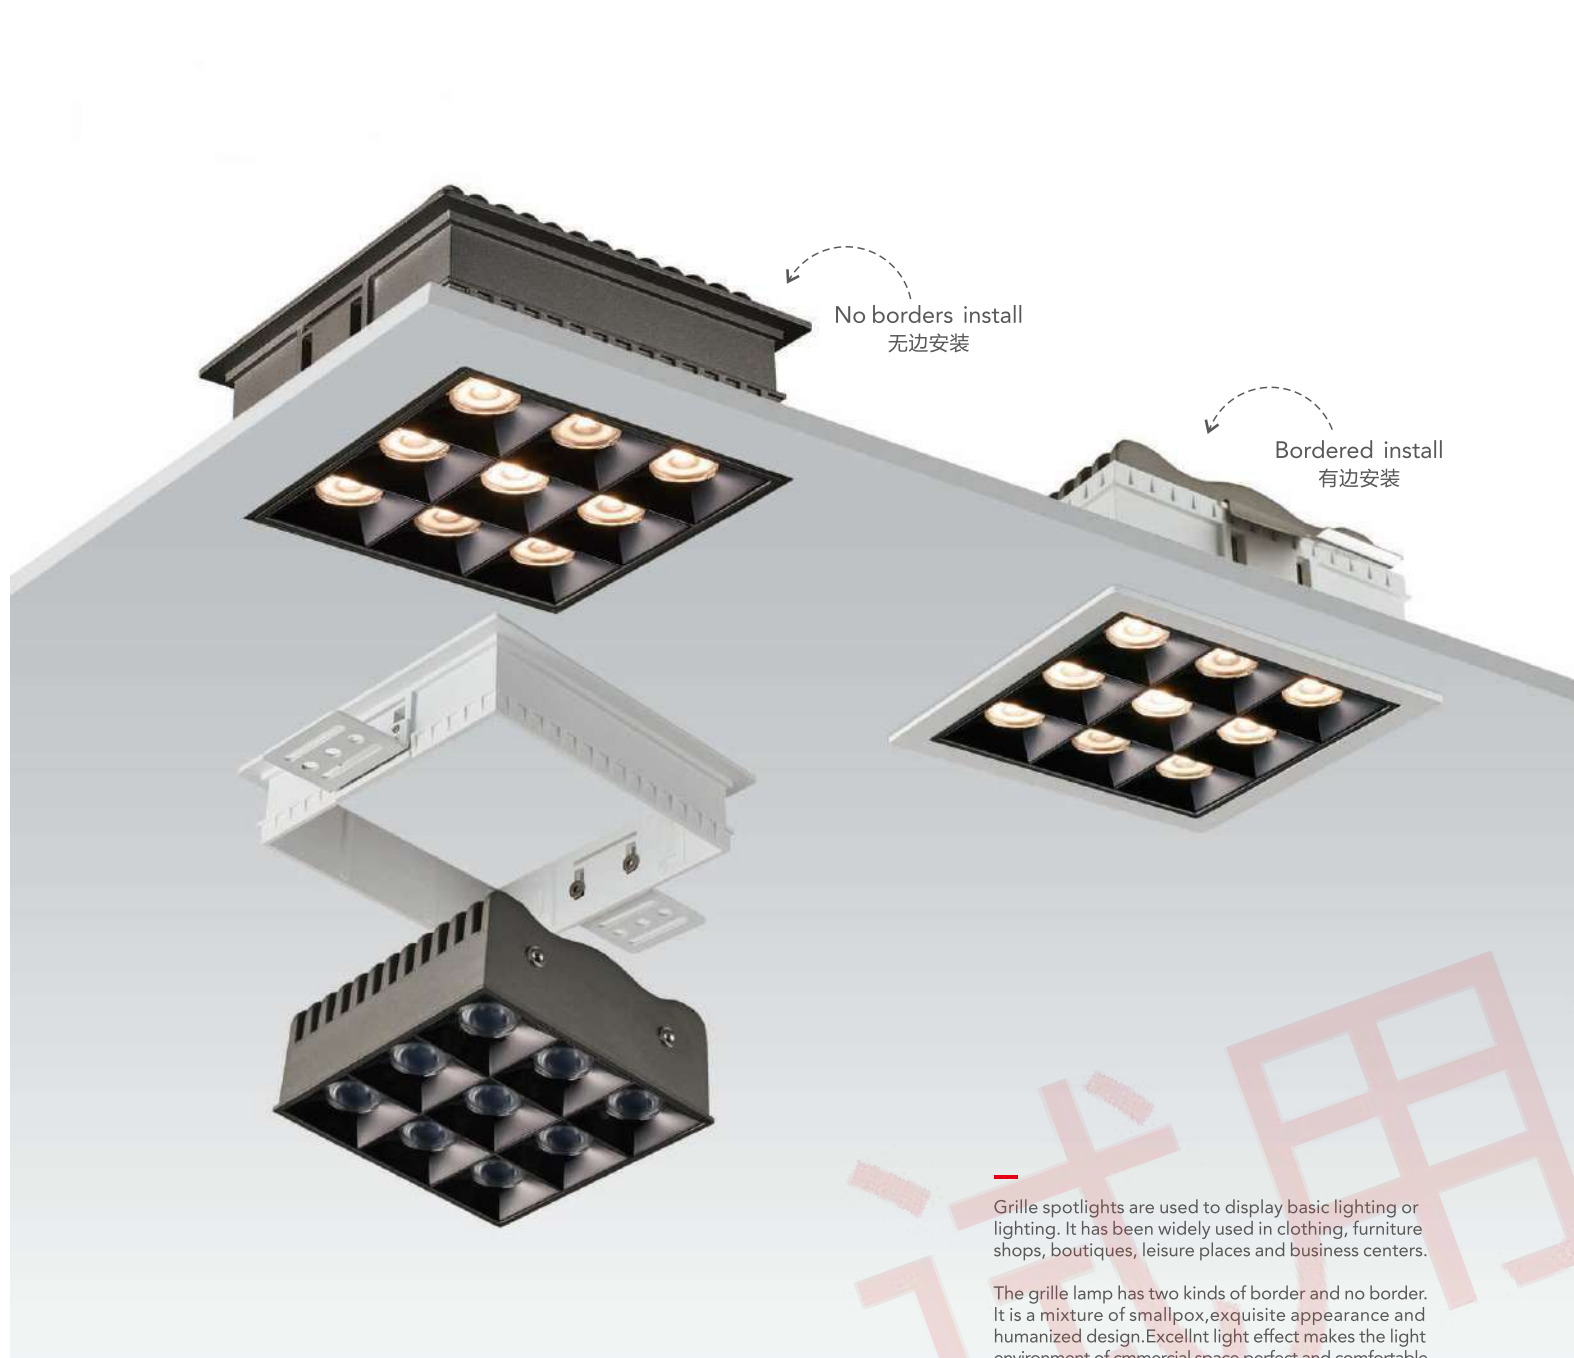

EM-006/EM-006B/EM-007/EM-007B	
Power	功率：4×5W/9×3.5W
LED	光源品牌：OSRAM 5050
CRI	显指：Ra90
CCT	色温：3000K/4000K/6000K
Luminous Flux	光通量：105-112LM
Beam Angle	光束角：25° (12°/15°/25°/55°/75°)
Beam Angle	光束角：35×75°/55×55°/75×75°/35×35°
Material	主要材质：Casting+Aluminum

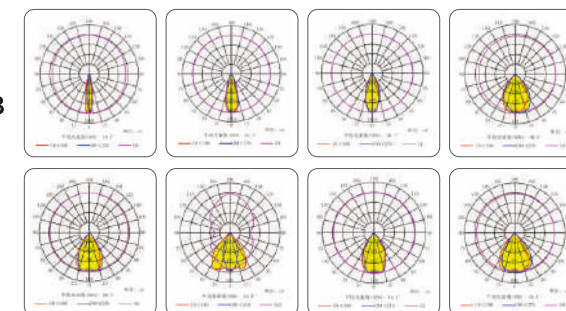




>30°


The light source is deep, and the light is not visible. The glare angle is >30°

Straight type according to
Beam accurate projection



MZ-152/MZ-153

Power	功率: 4×5W/9×3.5W
LED	光源品牌: OSRAM 5050
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 105-112LM
Beam Angle	光束角: 25° (12°/15°/25°/55°/75°)
Beam Angle	光束角: 35×75°/55×55°/75×75°/35×35°
Material	主要材质: Casting+Aluminum

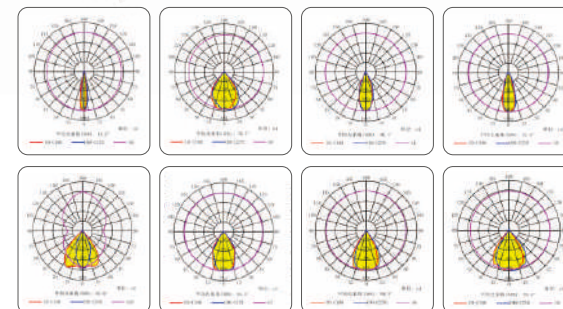

Optional color :





Intelligent Light Control
智能控光

MZ-205/MZ-206

Power	功率: 4×5W/9×3.5W*2
LED	光源品牌: OSRAM 5050
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 105-112LM
Beam Angle	光束角: 25° (12°/15°/25°/55°/75°)
Beam Angle	光束角: 35°/75°/55°/55°/75°/75°/35°/35°
Material	主要材质: Casting+Aluminum

Optional color :



White+Titanium gray

Black+Titanium gray

Titanium gray



- Series beam Angle configuration, meet different requirements of lighting in different places, and keep the design of lamps and lanterns uniform
- The guide lights are used to display the key lighting of the place. It has been widely used in clothing, furniture shops, boutiques, leisure places and business centers.
- The guide rail spotlight is a kind of high fixed lighting lamp which can adjust the angle freely. It has the characteristics of high illumination and concentrated light. It is the mainstream lighting for modern lighting schools

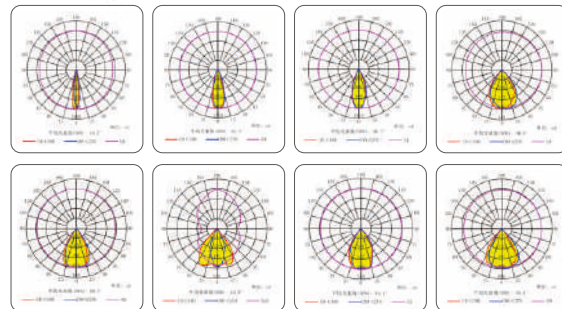


G-3034/G-3035

Power	功率：4×5W/9×3.5W
LED	光源品牌：OSRAM 5050
CRI	显指：Ra90
CCT	色温：3000K/4000K/6000K
Luminous Flux	光通量：105-112LM
Beam Angle	光束角：25° (12°/15°/25°/55°/75°)
Beam Angle	光束角：35×75°/55×55°/75×75°/35×35°
Material	主要材质：Casting+Aluminum



Optional color :





G-304/

Power	功率: 12W
LED	光源品牌: EPISTAR COB
CRL	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm/3000K/84lm/4000K/6000K
Beam Angle	光束角: 38° (15° 23°)
Material	主要材质: Casting




Optional color :




Sand White Sand Black





G-3039

Power	功率 : 12W
LED	光源品牌 : EPISTAR COB
CRI	显指 : Ra90
CCT	色温 : 3000K/4000K/6000K
Luminous Flux	光通量 : 80.5lm/3000K/84lm/4000K/6000K
Beam Angle	光束角 : 45° (15°23° 38° 60°)
Material	主要材质 : Casting



Anti glare design

Peoples attention and attention can be easily attracted by glittering things. Glare can create uncomfortable feelings for human eyes. Severe glare is more likely to cause blindness in a short time, and create a comfortable atmosphere in glare free environment.

Optional color :



Sand White



Sand Black




Sand White



Sand Black






C-3017/MZ-154

Power	功率: 12W
LED	光源品牌: EPISTAR COB
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 20°
Material	主要材质: Casting+Aluminum

>30°

The light source is deep, and the light is not visible. The glare angle is >30°

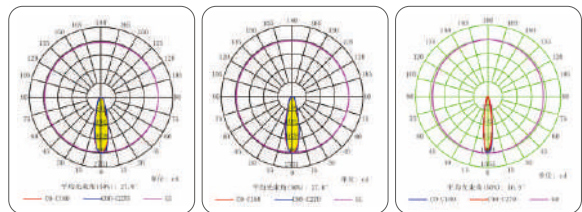


Black White Black/Golden White/Golden




>30°

The light source is deep, and the light is not visible. The glare angle is >30°



G-3017

Power	功率: 12W
LED	光源品牌: EPISTAR COB
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 20°
Material	主要材质: Casting+Aluminum



Black



White

Optional color :



Sand Black



WH/GD




BK/GD



Cut: Ø90mm


>30°

The light source is deep, and the light is not visible. The glare angle is >30°





EM-3017/C-3017*2

Power 功率: 12W/12W×2
LED 光源品牌: EPISTAR COB
CRL 显指: Ra90
CCT 色温: 3000K/4000K/6000K
Luminous Flux 光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle 光束角: 20°
Material 主要材质: Casting+Aluminum



Optional color :

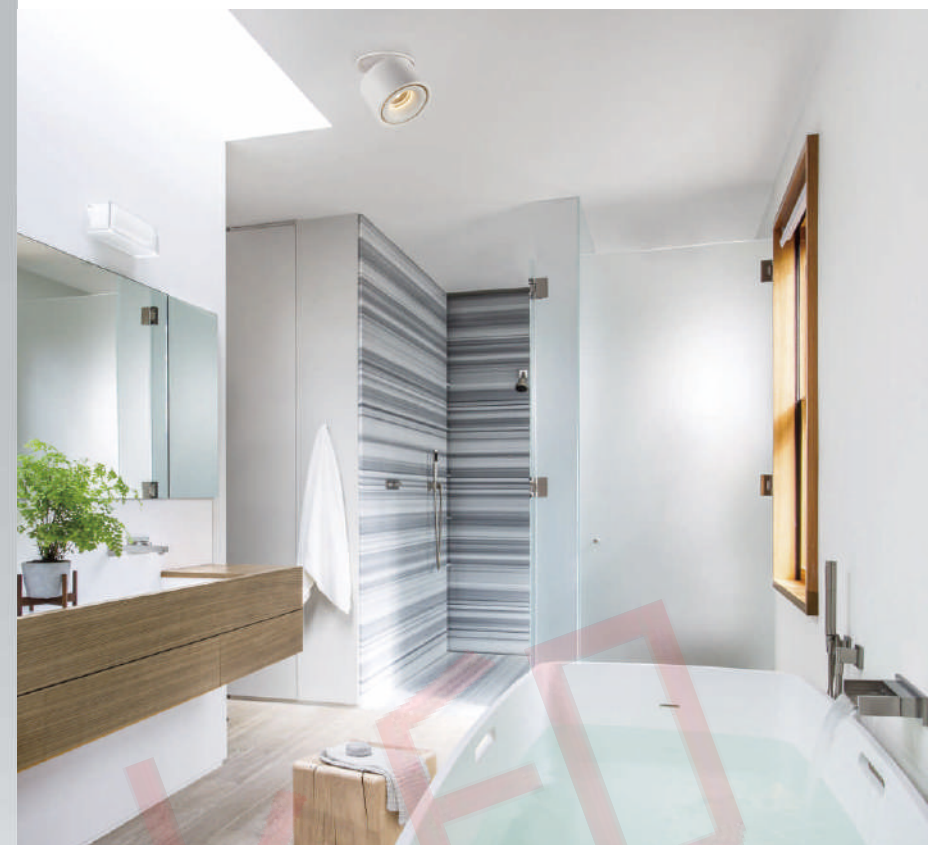




C-3030

Power	功率: 12W
LED	光源品牌: EPISTAR COB
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 20°
Material	主要材质: Casting

>30°

The light source is deep, and the light is not visible. The glare angle is >30°



Optional color :



Sand Black



Sand White



WH/GD



BK/GD





C-3040/C-3041

Power	功率: 10W/10W×2
LED	光源品牌: EPISTAR COB
CRL	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 24° (12°)
Material	主要材质: Casting+Aluminum

Optional color :




 WH/GD


 Sand White


 Sand Black

>30°

The light source is deep, and the light is not visible. The glare angle is >30°














MZ-149

Power	功率: 10W
LED	光源品牌: EPISTAR COB
CRL	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 24° (15°36°)
Material	主要材质: Casting+Aluminum

Optional color :



BK/WH WH/BK Sand Black Sand Black Sand White





MASK

Hight transmittance PMMA light guide plate Soft and comfortable light

Two cups


In order to meet the needs of different customers, the full range of specifications set up two kinds of reflective glasses.

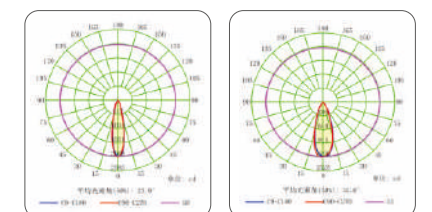



MZ-150

Power	功率: 10W×2
LED	光源品牌: EPISTAR COB
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 24° (15°/36°)
Material	主要材质: Casting+Aluminum

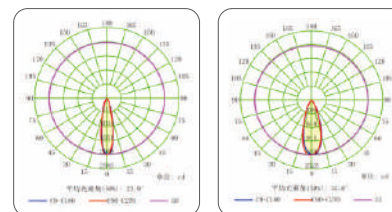

Optional color :




WH/BK BK/WH Sand Black Sand White Sand White Sand Black



Two cups


In order to meet the needs of different customers, the full range of specifications set up two kinds of reflective glasses.





MZ-164/MZ-165

Power	功率: 10W/12W
LED	光源品牌: EPISTAR COB
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 45° (15°23°38°60°)
Beam Angle	光束角: 60° (15°23°38°45°)
Material	主要材质: Casting+Aluminum

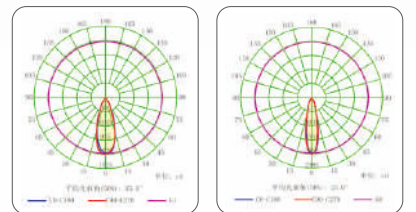

Optional color :



Sand White Sand Gray Sand Black







Different structures

Straight, adjustable angle design, can meet the requirements of the wall type or under lighting


Anti-dazzle design

The light source is deep, and the light is not visible, The glare angle is $>30^{\circ}$

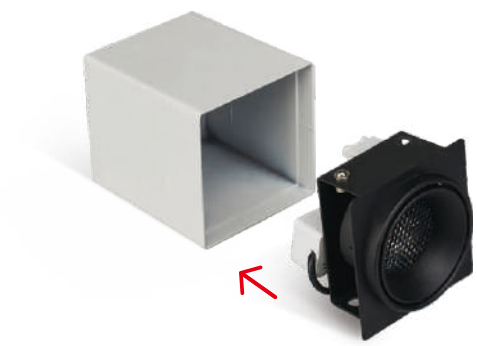

MZ-141

Power 功率: 7W
LED 光源品牌: EPISTAR COB
CRL 显指: Ra90
CCT 色温: 3000K/4000K/6000K
Luminous Flux 光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle 光束角: 20° (10° 30°)
Material 主要材质: Casting

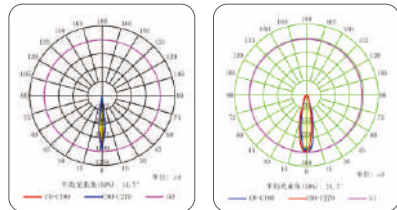

Optional color :



Sand White



Sand Gray



Sand Black


Optical configuration:
Cellular network







MZ-162

Power	功率: 7W
LED	光源品牌: EPISTAR COB
CRI	显指: Ra90
CCT	色温: 3000K/4000K/6000K
Luminous Flux	光通量: 80.5lm 3000K/84lm 4000K/6000K
Beam Angle	光束角: 20° (10° 30°)
Material	主要材质: Casting



350°
110



Optional color :



Sand White Sand Gray Sand Black

Optical configuration:

Cellular network





241

242